


Soner

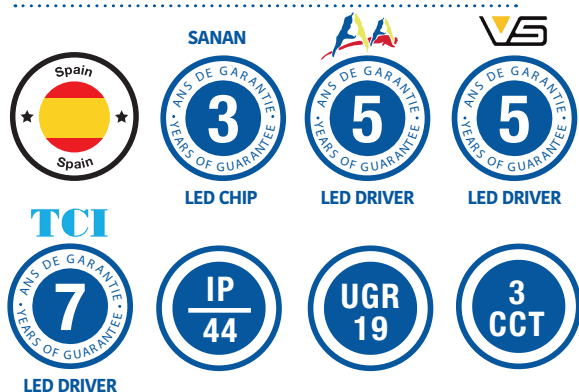

MATERIAL: LUMINIUM AND PMMA.

MATIÈRE: ALUMINIUM ET PMMA

Finishes
Couleur

How it works
Comment ça marche




400 White
Blanc

Driver	Driver Brand	Dimm	Guarantee	PF
-	AA. SPAIN	NO	5	>0,9
TCI	TCI	NO	7	>0,95
VS	VOSSLOH SCHWABE (Made in P.R.C.)	NO	5	>0,97
DIMM	TCI	1-10V / PUSH	7	>0,95
DALI	TCI	DALI	7	>0,92
VS-DALI	VOSSLOH SCHWABE (Made in Italy)	DALI	5	>0,95



Ref. 02-415 Ref. 02-515 Ref. 02-615 Ref. 02-815

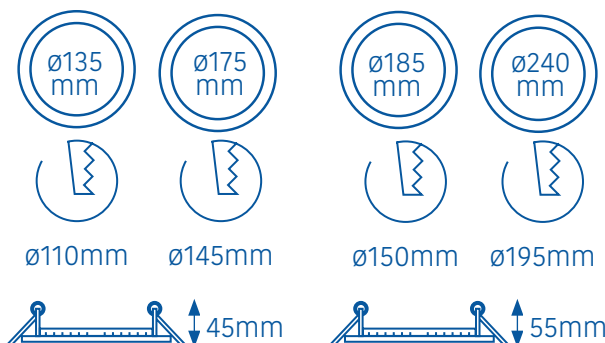

ACCESORIES/ACCESSOIRES PAG 93

EMERGENCY KIT

Ref. Brand Hour / Heure

KE-1H-7W-TCI	TCI	1
KE-3H-7W-TCI	TCI	3



LED CHIP: SANAN SMD 5630 ; CRI > 80 / 36,000 hours ; 15,000 ON/OFF; 3 YEARS GUARANTEE

Serie	W	Finish	DRIVER	K	lm	V	Hz	o				
02-415	-	15	-	400	-		3000/4000/5500	1730	220-240	50/60	120	1/20
02-515	-	15	-	400	-		3000/4000/5500	1730	220-240	50/60	120	1/20
02-615	-	20	-	400	-		3000/4000/5500	2260	220-240	50/60	120	1/20
02-815	-	20	-	400	-		3000/4000/5500	2260	220-240	50/60	120	1/20
02-815	-	30	-	400	-		3000/4000/5500	3370	220-240	50/60	120	1/20

** Available with only 1 CCT, MOQ, 500 pcs

** Disponible avec seulement 1 CCT, MOQ, 500 pcs.