
## Key **Features**

- SuperClear® IPS Technology
- Frameless Bezel and metallic triangle stand
- Full HD 1080p resolution
- 75Hz Refresh Rate with Adaptive Sync
- HDR10 Support



## Product **Description**

The ViewSonic VX3276-MHD-3 is the perfect blend of style and performance with features that include a sizeable 32" (31.5" viewable) Full HD display and minimalist design. With an ultra-slim profile, metallic silver triangle stand, and sleek edge-to-edge frameless bezel, the monitor has a premium feel that fits nicely both at home and in the office. VX3276-MHD-3 features 1080p resolution, IPS-type panel technology and dual integrated speakers to produce astonishing visual and sound effect from multimedia contents.

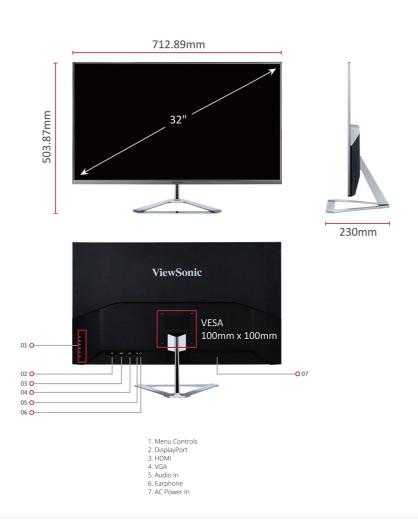

**Visit Us** 

www.viewsonic.com

DISPLAY		VIDEO INPUT	
Display Size (in.):	32	Digital Sync:	TMDS - HDMI (v1.4), PCI-E -
Viewable Area (in.):	31.5	- 1	DisplayPort (v1.4)
Panel Type:	IPS Technology	Analog Sync: ERGONOMICS	Separate - RGB Analog
Resolution:	1920 x 1080	Tilt (Forward/Back):	-4° / 15°
Resolution Type:	FHD (Full HD)	WEIGHT (IMPERIAL)	-4 / 13
Static Contrast Ratio:	1,200:1 (typ)	Net (lbs):	13.7
Dynamic Contrast Ratio:	80M:1	Net Without Stand (lbs):	12.3
Light Source:	LED	Gross (lbs):	18.1
Brightness:	250 cd/m² (typ)	WEIGHT (METRIC)	10.1
Colors:	16.7M	Net (kg):	6.2
Color Space Support:	8 bit true	Net Without Stand (kg):	5.6
Aspect Ratio:	16:9	Gross (kg):	8.2
Response Time (Typical GTG):	4ms	DIMENSIONS (IMPERIAL) (WX	
Viewing Angles:	178º horizontal, 178º vertical	Packaging (in.):	31.7 x 20 x 4.3
Backlight Life (Hours):	30000 Hrs (Min)	Physical (in.):	28.1 x 19.8 x 9.1
Curvature:	Flat	Physical Without Stand (in.):	28.1 x 16.4 x 1.5
Refresh Rate (Hz):	75	DIMENSIONS (METRIC) (WXH	
Adaptive Sync:	Yes	Packaging (mm):	806 x 509 x 109
Blue Light Filter:	Yes	Physical (mm):	713 x 504 x 230
Flicker-Free:	Yes	Physical Without Stand (mm):	713 x 416 x 38
	NTSC: 72% size (Typ)	GENERAL	
Color Gamut:	sRGB: 104% size (Typ)		CE, CE EMC, CB, RoHS, ErP,
Pixel Size:	0.364 mm (H) x 0.364 mm (V)  Anti-Glare (Semi-Glossy), Hard	Regulations:	REACH, WEEE, EAC, UKrSEPRO, UKCA, BSMI, RCM, GEMS, KC, e- Standby, BIS
Surface Treatment:	Coating (3H)		VX3276-MHD-3 x1, 3-pin Plug (IEC
COMPATIBILITY		PACKAGE CONTENTS:	C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, Quick Start Guide x1
PC Resolution (max):	1920x1080		Please dispose of in accordance with
Mac® Resolution (max):	1920x1080	Recycle/Disposal:	local, state or federal laws.
PC Operating System:	Windows 7/8/8.1/10/11 certified; macOS tested	Warranty:	*Warranty offered may differ from market to market
Mac® Resolution (min):	1920x1080		
CONNECTOR			
VGA:	1		
3.5mm Audio In:	1		
3.5mm Audio Out:	1		
HDMI 1.4:	1		
DisplayPort:	1		
Power in:	3-pin Socket (IEC C14 / CEE22)		
AUDIO			
Internal Speakers:	2Watts x2		
POWER	2014		
Eco Mode (Conserve):	26W		
Eco Mode (optimized):	31W		
Consumption (typical):	36W		
Consumption (max):	40W		
Voltage:	AC 100-240V		
Stand-by:	0.5W		
Power Supply:	Internal Power Supply		
ADDITIONAL HARDWARE			
Kensington Lock Slot:	1		
CONTROLS			
Physical Controls:	Key 1 (game mode), Key 2, Key 3, Key 4, Key 5, Key 6 (power)		
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu		
OPERATING CONDITIONS  Temperature:	32°F to 104°F (0°C to 40°C)		
Humidity (non-condensing):	20% to 90%		
WALL MOUNT	2570 10 0070		
VESA Compatible:	100 x 100 mm		
INPUT SIGNAL			
Frequency Horizontal:	24 ~ 86KHz		
Fraguency Verticals	50 75H=		

Copyright © ViewSonic Corporation 2000-2023. All rights reserved.

50 ~ 75Hz

Frequency Vertical: