


WHBS C92F LT X

12NC: 859991593310

GTIN (EAN) code: 8003437606939

Whirlpool

SENSING THE DIFFERENCE

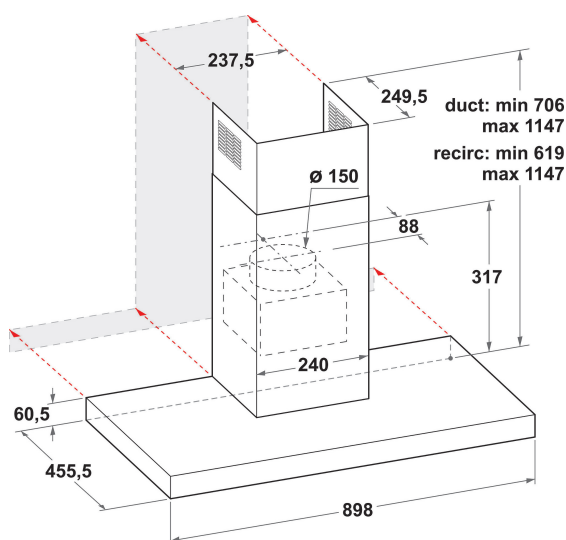

- 6thSenseLive: Connectivity
- Maximum noise level 61 dBA
- Noise Level (min. - max.): 32-61 dBA
- Air Flow (min. - max.): 125, 430, booster 730 m³/h
- Maximum extraction rate: 430 (m³/h)
- Energy class B
- Extraction / Recirculation Rate
%Z_REQ_MAX_OUT_EXTRACTION% / 290 m³/h
- Speeds: 4 + Booster
- Odour Filter
- ZenMode
- 2 LED, 5 W lamps
- 1 x 250 W motor
- Electronic Touch control
- 3 Washable aluminium filters
- Grease Filtering Efficiency Class: C
- Lighting Efficiency Class: A

Whirlpool wall mounted cooker hood: 90cm - WHBS C92F LT X

This Whirlpool wall mounted Cooker Hood features: dishwasher-safe, washable aluminium grease filters. LED lights for ideal lighting. An outstanding cooker extractor fan, ensuring a fresh, grease-free cooking environment. Between 60cm and 90cm wide appliance. High-efficiency S40HE motor.



6th Sense Live App

The 6thSenseLive App gives the user complete control over the hood, even when out of the house, speeding up cooking times and keeping the air fresh and clean.



LED lighting

Increased energy and cost efficiency. The LED lighting system lasts 10 times longer than traditional bulbs and uses 90% less energy.



ZenMode

Providing the ideal balance between performance and silence, Whirlpool's ZenMode ensures the hood is powerful enough to keep the air fresh and clean while making the kitchen a quieter, more enjoyable place for cooking and socialising.



4 Speeds

Versatile performance. This Whirlpool Hood offers 4 speed options, giving you complete control over the extraction rate.



Super Silent

Silent efficiency. This Whirlpool Hood is designed to operate at low noise-levels, so you can enjoy some extra peace and quiet.



Wall-mounted installation

Wall-mounted installation. This wall-mounted Whirlpool Hood is a breeze to install.



Total annual energy consumption

Ideal performance, outstanding savings. Whirlpool Hoods are designed to provide exceptional results, while reducing energy costs.



Electronic control

Effortless control. This Whirlpool Hood includes an intuitive electronic user interface, designed to provide you with the simplest, most satisfying user experience ever.



High efficiency motor

Efficiency first. The motor in this Whirlpool Hood is designed to provide ideal filtration, while ensuring high energy efficiency.

WHBS C92F LT X

12NC: 859991593310

GTIN (EAN) code: 8003437606939

Whirlpool

SENSING THE DIFFERENCE

MAIN FEATURES

Product group	Hood
Colour body	Inox
Material body	Aluminium
Colour chimney	Inox
Material chimney	Aluminium
Typology	Wall-mounted
Installation type	Wall-mounted
Type of control	Electronic
Type of control settings	-
Decor panel options	N/A
Motor location	Integrated motor in hood body
Operating Mode	Convertible
Electrical connection rating (W)	255
Current (A)	1,1
Voltage (V)	200-240
Frequency (Hz)	50
Length of Electrical Supply Cord (cm)	150
Plug type	Schuko
Chimney height (mm)	-
Height of product, without chimney (mm)	317
Height of the product	1140
Width of the product	900
Depth of the product	456
Minimum niche height	0
Minimum niche width	0
Niche depth	0
Net weight (kg)	14.2

TECHNICAL FEATURES

Type of manual control devices	Touch control
Type of automatic control devices	-
Number of motors	1
Total power of the motors (W)	250
Number of speed settings: boost option availability	4
Boost presence	Yes
Maximum output air extraction (m³/h)	430
Boost position air extraction (m³/h)	730
Maximum output recirculating air (m³/h)	290
Boost position output recirculating (m³/h)	325
Light Control Type	On/Off
Number of lights	2
Type of lamps used	LED
Total power of the lamps (W)	5
Diameter of air outlet (mm)	150
No-return airflow flap	Yes
Grease filter material	Washable aluminium
Odour filter	Yes

PERFORMANCES

Sound power at min. speed (2010/30/EU)	32
Sound power at max. speed (2010/30/EU)	61
Noise level with boost position (dB(A) re 1 pW)	72

