



CorePro LED PLC 2P



CorePro LED PLC 8.5W 830 2P G24d-3

The CorePro LED PLC 2P integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting applications: it meets basic lighting requirements, offers significant energy savings and is environmentally friendly.

Product data


General Information		Starting time (nom.)	
Cap base	G24D-3 [G24d-3]	Warm-up time to 60% light (nom.)	0.5 s
EU RoHS compliant	Yes	Power factor (nom.)	0.9
Nominal lifetime (nom.)	30000 h	Voltage (Nom)	220-240 V
Switching cycle	50,000X	Temperature	
	Sphere	T-ambient (max.)	35 °C
Light Technical		T-ambient (min.)	-20 °C
Colour Code	830 [CCT of 3,000 K]	T storage (max.)	65 °C
Beam Angle (Nom)	120 °	T storage (min.)	-40 °C
Luminous flux (nom.)	950 lm	T-Case maximum (nom.)	75 °C
Colour designation	White (WH)	Controls and Dimming	
Correlated Colour Temperature (Nom)	3000 K	Dimmable	No
Luminous efficacy (rated) (nom.)	105.88 lm/W	Mechanical and Housing	
Colour consistency	<6	Product length	200 mm
Colour rendering index (nom.)	83	Bulb shape	Tube, single-ended
LLMF at end of nominal lifetime (nom.)	70 %	Approval and Application	
Operating and Electrical		Energy Efficiency Class	F
Input frequency	50 to 60 Hz	Energy-saving product	Yes
Power (Rated) (Nom)	8.5 W		
Lamp current (max.)	43 mA		
Lamp current (min.)	33 mA		

CorePro LED PLC 2P

Approval marks	TUV CE marking RoHS compliance KEMA Keur certificate
Energy consumption kWh/1,000 hours	9 kWh
	403554
Product Data	
Full product code	871869654123400
Order product name	CorePro LED PLC 8.5W 830 2P G24d-3

EAN/UPC – product	8718696541234
Order code	54123400
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929001201202
SAP net weight (piece)	0.090 kg


Dimensional drawing

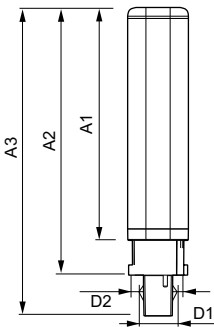


LEDtube PLC 8.5W G24d-3/830 2P

Product	D1	D2	A1	A2	A3
CorePro LED PLC 8.5W 830 2P G24d-3	24.3 mm	28.4 mm	128.8 mm	148 mm	170.6 mm


Photometric data



General Uniform Lighting
1 x PLC 8.5W (830) G24d-3/830 2P
Page 107


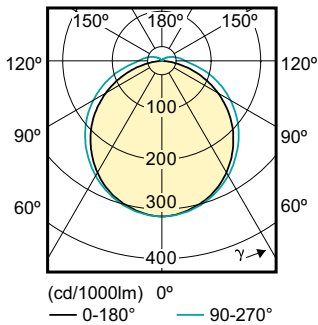


LEDtube PLC 100mm 9W G24D-3 830 950lm

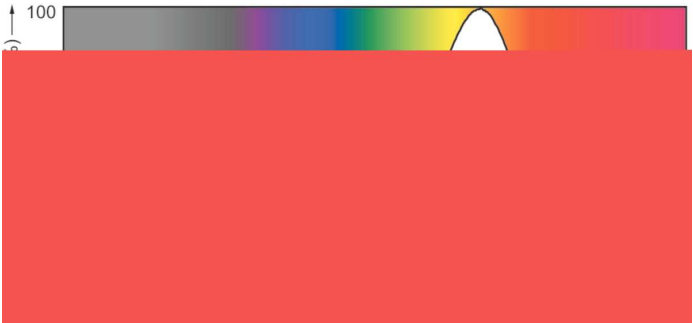


CorePro LED PLC 2P

Lifetime

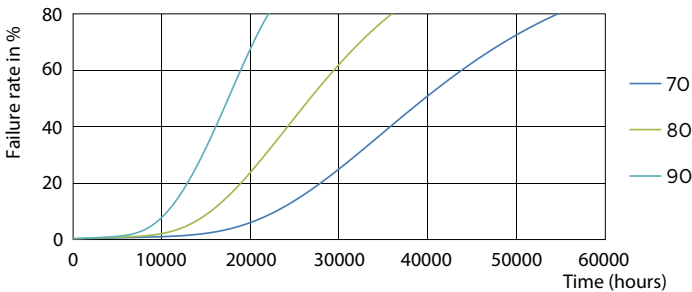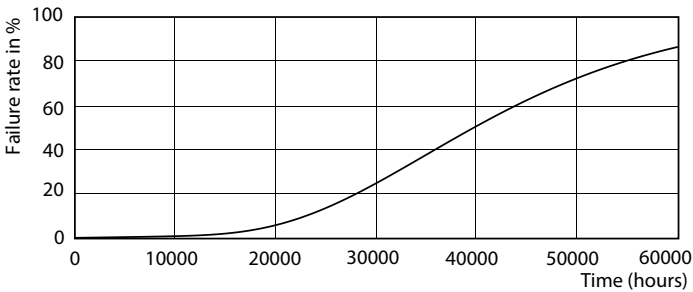


LEDtube PLC 100mm 9W G24D-3 830 950lm

LEDtube PLC 100mm 9W G24D-3 830 950lm

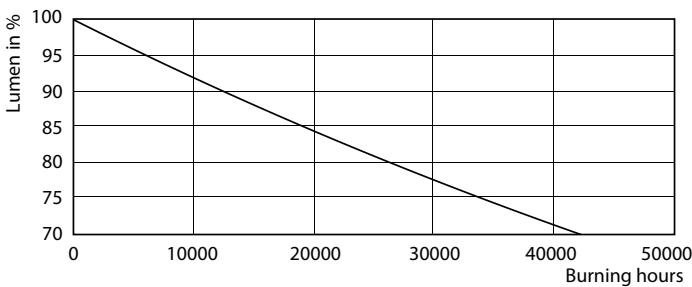

LEDtube PLC 100mm 9W G24D-3 830 950lm

LEDtube PLC 100mm 9W G24D-3 830 950lm



LEDtube PLC 100mm 9W G24D-3 830 950lm

CorePro LED PLC 2P

