

Ecostat

Bath thermostat Comfort for exposed installation

Surfaces: **Brushed Bronze** Article Number: **13114140**



Description

product features

- projection 177 mm
- 2 functions
- centre distance: 150 ± 12 mm
- spray type mixer: normal spray
- flow rate for bath spout at 3 bar: 20 l/min
- flow rate of hand shower at 3 bar: 16 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- thermostat cartridge, shut-off/ diverter valve
- safety lock at 40 °C
- temperature limitation adjustable
- non-return valve
- with silencer
- material handles: metal
- connection type: s-shaped connections
- connection dimension: DN15
- dirt filter included

Technology




Design awards



Product image



Scale drawing

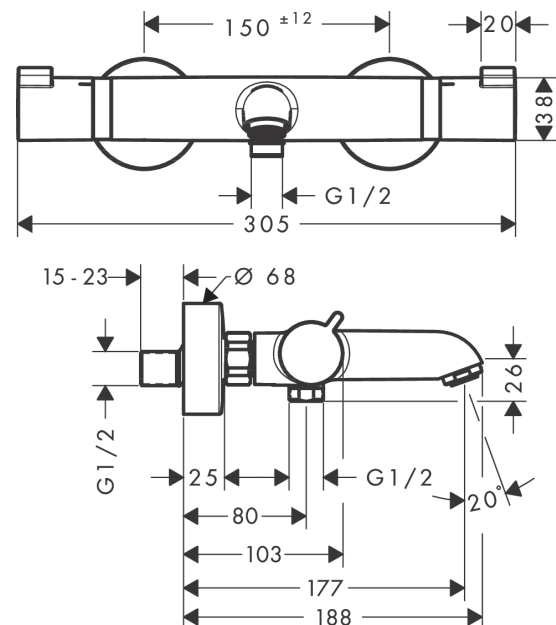


Ecostat

Bath thermostat Comfort for exposed installation

Surfaces: **Brushed Bronze** Article Number: **13114140**



Flowchart

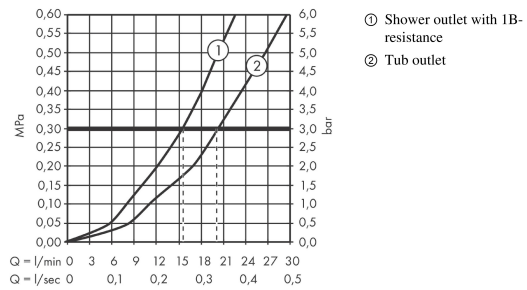

Ecostat


Bath thermostat Comfort for exposed installation

Surfaces: **Brushed Bronze** Article Number: **13114140**



Exploded Drawing

Year of production: >07/19

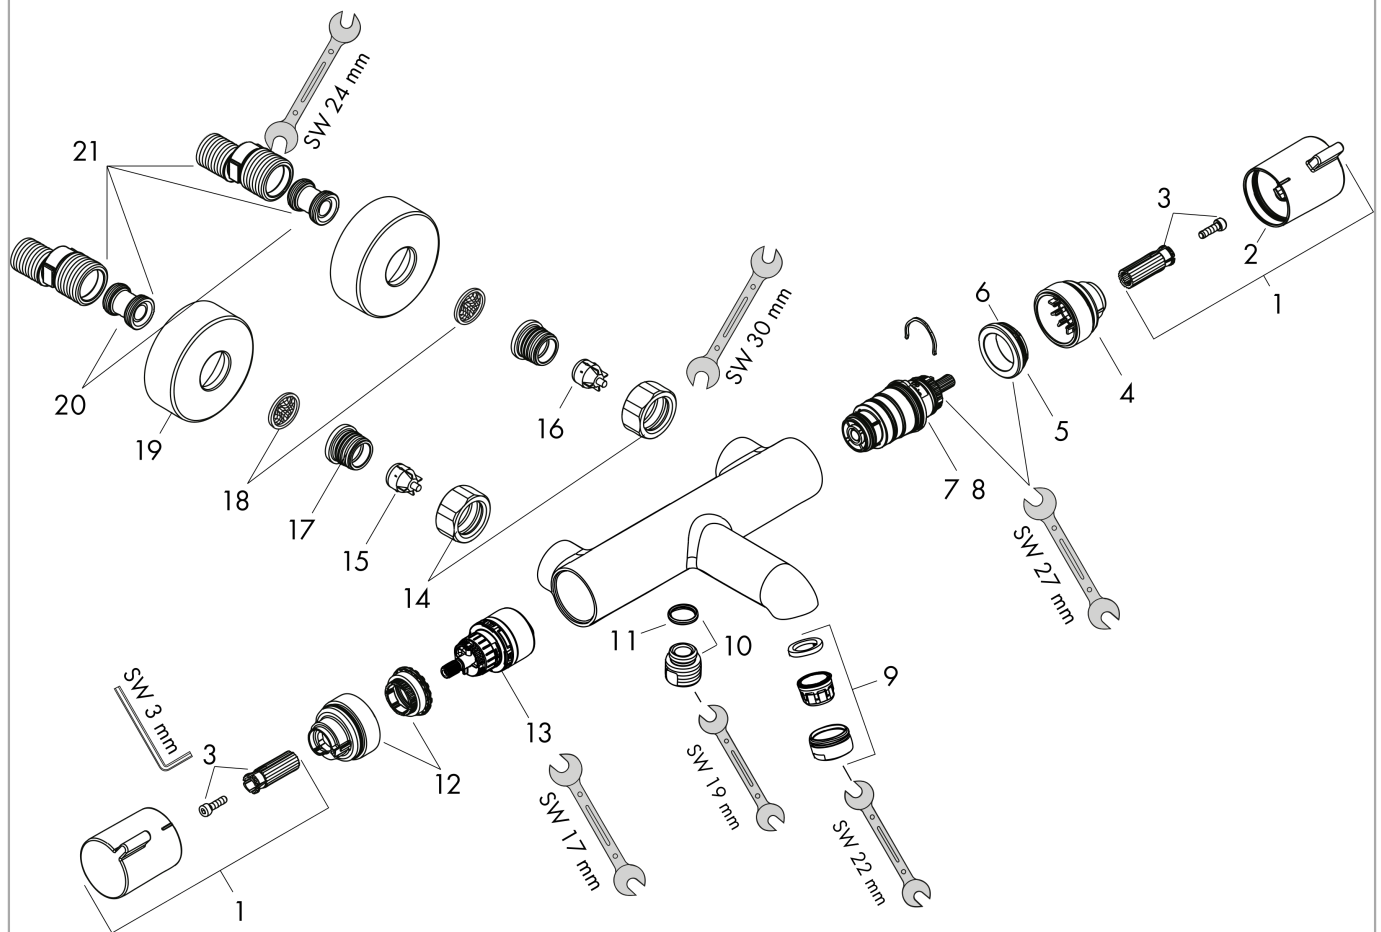

Ecostat**Bath thermostat Comfort for exposed installation**Surfaces: **Brushed Bronze** Article Number: **13114140****Spare part list**

Year of production: >07/19

Pos.	Description	Article Number	Price	PU
1	handle	95836140	-	1
2	pushbutton	92848000	-	1
3	handle fixing set	95843000	-	1
4	safety set	95839000	-	1
5	nut	98913000	-	1
6	O-ring 26x1,5	98390000	-	1
7	thermostat cartridge	98282000	-	1
8	cartridge for exchanged connections	92373000	-	1
9	aerator M24x1 (30 l/min)	96512140	-	1
10	connecting thread	95392XXX	-	-
11	O-ring 14x2	98129000	-	1
12	safety set	95840000	-	1
13	shut off unit with selector	98283000	-	1
14	set of nuts	96157140	-	1
15	non return valve (pressure-resistant up to 2 MPa)	93136000	-	1
16	non return valve	96737000	-	1
17	O-ring 17x1,5	98137000	-	1
18	filter packing	96922000	-	1
19	escutcheon Ø 68 mm	96467140	-	1
20	set of S-unions (±12 mm)	94140000	-	1
21	noise reduction	96429000	-	1