


FCS-4203 GEMINI Zoom Dome IP Camera, 2-MP, H.265

Product Images

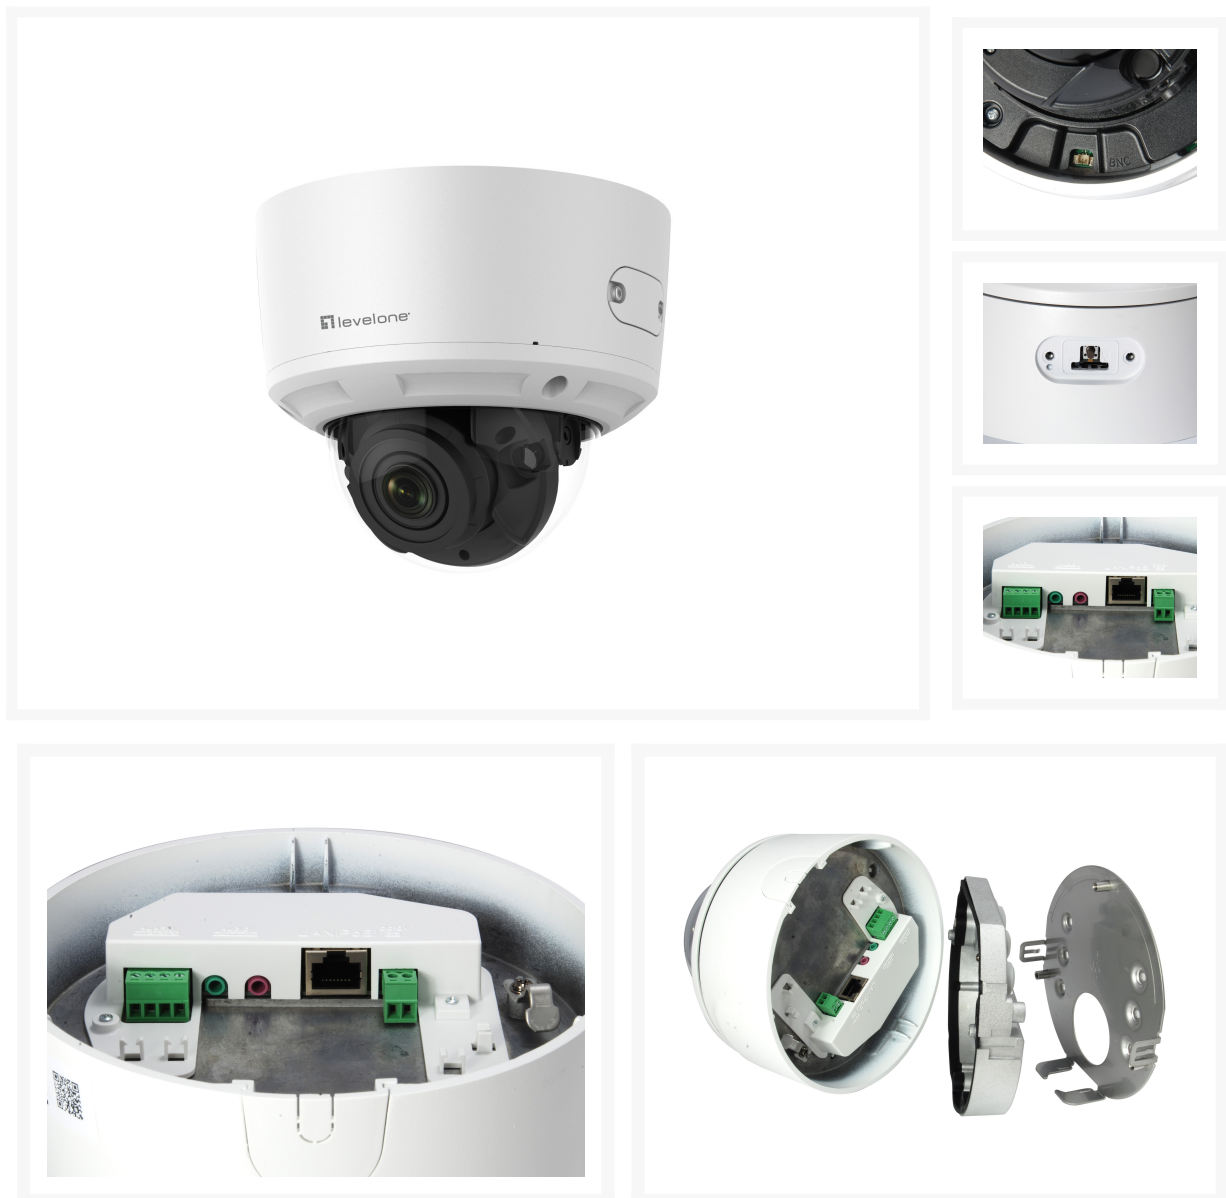

Short Description

- Built-in Micro SD/SDHC card slot for local storage

- Video compression: H.264, H.265, MJPEG
- Power support: PoE (IEEE 802.3af)
- Vandal-proof IK10-rated housing
- Supports 4.3X optical zoom
- Built-in Micro SD/SDHC card slot for local storage

Description

The LevelOne FCS-4203 Fixed Dome Outdoor Camera offers a highly reliable, cost-effective outdoor IP surveillance solution in a low-profile dome mounted casing, which is rated at IP66 and able to withstand outdoor operating conditions such as rain, snow, extreme heat, dust and humidity. The FCS-4203 offers 2-Megapixel resolution, and with 802.3af standard PoE, can use a single Cat.5 cable to run both power and data, making deployments easy and flexible. The dome mounting prevents malicious tampering with the camera, making it a secure and smart choice for all outdoor installations.

Additional Information

Fast Ethernet RJ45	10/100 Mbps PoE 802.3af
3.5mm audio in/out	In x1, Out x1
Harmonized System (HS) code	852589
Customs product code (TARIC)	8525890000
Features	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
PoE Supported	Yes
2-way audio	Yes
DI/DO	Yes
IR LED for night vision	Yes
Max. Resolution	2 Megapixels
Resistance	Weatherproof
IP Camera series	GEMINI
Camera Type	Dome
Zoom type	Motorization
Operating humidity	0% RH ~ 90% RH
Operating temperature	-30°C ~ 60°C
Supported browsers	Internet Explorer 9.0 or above Edge
Storage temperature	0°C ~ 95°C
Approval and Compliance	CE/FCC/UL,IK10,IP67
Package Contents	FCS-4203 Screw Kit Resource CD (User Manual, Utility, 64-CH Monitoring Software)
Product weight (kg)	1,287
Dimensions (W x D x H)	133.1 x 153.4 x 153.4 mm
Color	White
EAN	4015867203415

Model Number	FCS-4203
Optical zoom	4x
Port Configuration	RJ-45,VDC, AudioIn/Audio Out,
Power consumption	12 VDC, 0.75A, max. 9.5W PoE0.3A to 0.1A, max. 11W
Power supply included	No
Resolution	50Hz: 25fps (1920 * 1080, 1280 * 960, 1280*720) 60Hz: 30fps (1920 * 1080, 1280 * 960, 1280*720)
Shutter time	1/3 s to 1/100,000 s
Standard	TCP/IP (IPv4), UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Storage capacity	Support Micro SD/SDHC/SDXC card with ANR (up to 128G)
Video format	H.265/H.264/MJPEG
Weatherproof rating	IP67
Angle of view (°)	Horizontal field of view: 105 to 35
Audio format	G.711/G.722.1/G.726/MP2L2, 64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 128 Kbps (MP2L2
Digital zoom	8X
Image sensor	1/2.8" Progressive Scan CMOS
Indicators	Power
IR cut filter	Yes
IR range	Up to 30 meter
Lens	2.8 mm to 12 mm @ 1.4, motorized lens
Minimum illumination (lux)	Color: 0.005 Lux @ (F1.2, AGC ON), 0 Lux with IR B/W: 0.0068 Lux @ (F1.4, AGC ON), 0 Lux with IR
Mount	Wall mount

