Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Light Prestige

Supplier's address: Departament Sprzedaży, Torowa 45, 32-050 Skawina, PL

Model identifier: LP-2310/1C BK

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Pady lutownicze		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

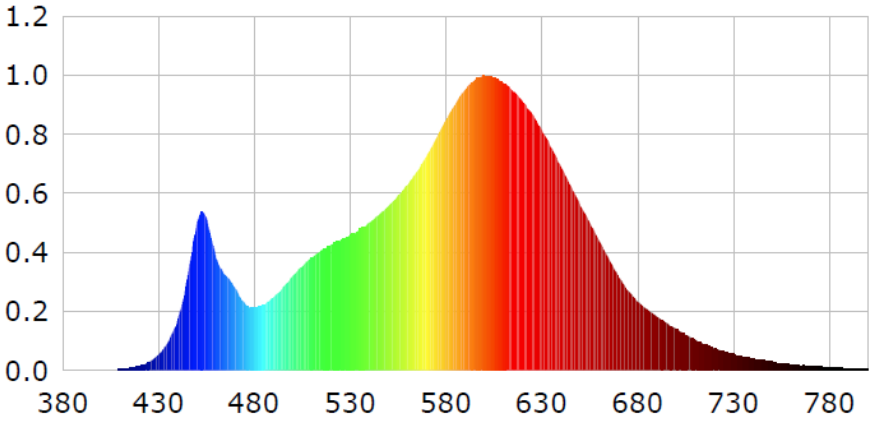
Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	60	Energy efficiency class	F
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	5 918 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000 or 6 000
On-mode power (P_{on}), expressed in W	60,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control — Height	750	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
Width	8		
Depth	1		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[(a)]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,440 0,403
Parameters for LED and OLED light sources:				
R9 colour rendering index value		4	Survival factor	0,90
the lumen maintenance factor		0,96		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,50	Colour consistency in McAdam ellipses	2
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[(b)]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,0	Stroboscopic effect metric (SVM)	0,2

(a) '-' : not applicable;

(b) '-' : not applicable;


1.2
1.0
0.8
0.6
0.4
0.2
0.0
380
430
480
530
580
630
680
730
780

Model placed on the Union market from 20/10/2025

EPREL registration number: 2432260

https://eprel.ec.europa.eu/qr/2432260

Supplier: LIGHT PRESTIGE SPÓŁKA Z OGRANICZONĄ ODPOWIEDZIALNOŚCIĄ SPÓŁKA KOMANDYTOWA (Manufacturer)

Website: www.lightprestige.pl

Customer care service:

Name: Departament Sprzedaży

Website:

Email: agnieszka.dukala@lightprestige.pl

Phone: +48697010030

Address:
Torowa 45
32-050 Skawina
Poland