

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: NOWODVORSKI

Supplier's address: NOWODWORSKI SPÓŁKA JAWNA, Bojemskiego 11, 42-202 Częstochowa, PL

Model identifier: 9343

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		9	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		773 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W		8,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	58	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	111		
	Depth	2		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,433 0,397	
Parameters for directional light sources:				
Peak luminous intensity (cd)	1 973	Beam angle in degrees, or the range of beam angles that can be set	30	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	-3	Survival factor	-	
the lumen maintenance factor	-			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,92	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,0	


(a) '-': not applicable;

(b) '-': not applicable;

Spectral distribution (380-780nm)

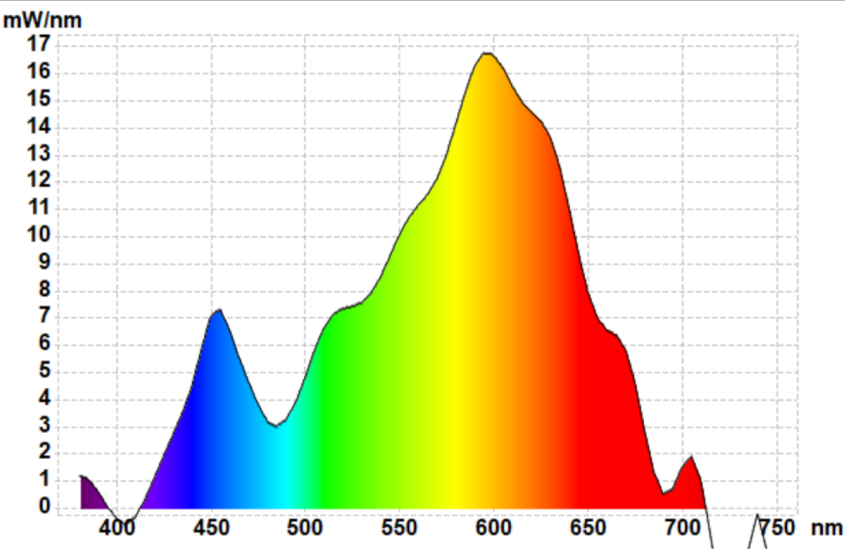

Model placed on the Union market from 01/09/2021.



EPREL registration number: 893639

<https://eprel.ec.europa.eu/qr/893639>

Supplier: NOWODWORSKI SPÓŁKA JAWNA (Manufacturer)

Website:

Customer care service:

Name: NOWODWORSKI SPÓŁKA JAWNA

Website:

Email: p.kotnowska@nowodvorski.com

Phone: +48 34 344 91 10

Address:

Bojemskiego 11
42-202 Częstochowa
Poland