
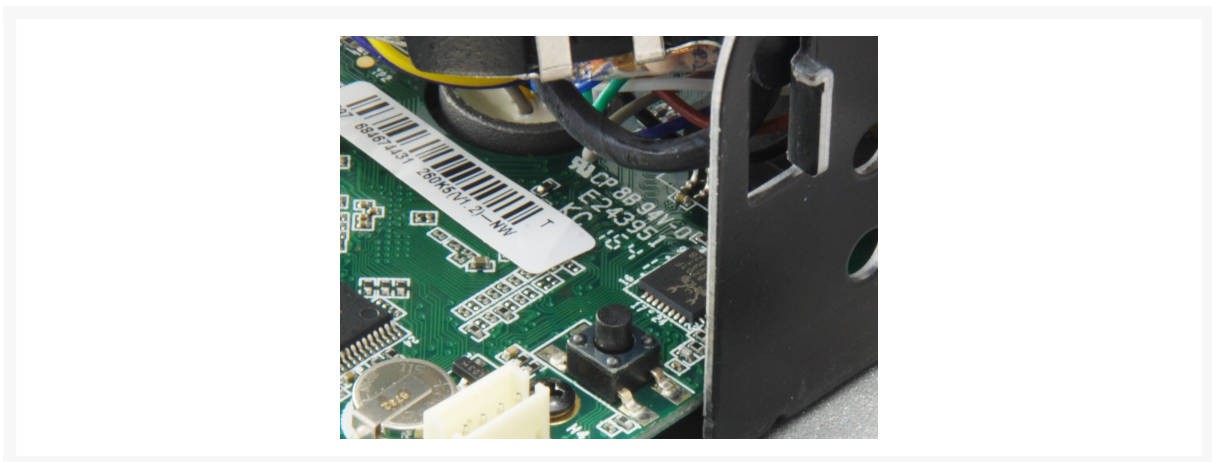


FCS-3087 GEMINI Fixed Dome IP Network Camera, 5-Megapixel, 802.3af PoE, IR LEDs, Indoor/Outdoor, two-way audio, Vandalproof

Product Images



Short Description

- 5-Megapixel high-definition resolution
- Built-in infrared LEDs for night viewing up to 30m
- Removable IR-cut filter for day and night surveillance
- Video compression: H.264, MJPEG
- Power support: PoE (IEEE 802.3af)
- Features WDR (Wide Dynamic Range) to enhance visibility under extremely bright or dark environments
- Vandal-proof IK10-rated housing
- Weatherproof IP66-rated housing
- Free surveillance and CMS (Central Management System) software packages with 64-channel license

Description

The LevelOne FCS-3087 Fixed Dome Outdoor Camera offers a highly reliable, cost-effective outdoor IP surveillance solution in a low-profile dome mounted casing, which is rated at IP66 and able to withstand outdoor operating conditions such as rain, snow, extreme heat, dust and humidity. The FCS-3087 offers 5-Megapixel resolution, and with 802.3af standard PoE, can use a single Cat.5 cable to run both power and data, making deployments easy and flexible. The dome mounting prevents malicious tampering with the camera, making it a secure and smart choice for all outdoor installations.

Additional Information

Fast Ethernet RJ45	1 x RJ-45 10/100 Mbps PoE port
Terminal block	(1 DI/1 DO)
Harmonized System (HS) code	852589
Customs product code (TARIC)	8525890000
Features	Saturation, brightness, contrast adjustable through client software or web browser Security: Motion detection, video tampering alarm, illegal login Video: Anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark
PoE Supported	Yes
2-way audio	Yes
DI/DO	Yes
IR LED for night vision	Yes
Max. Resolution	5 Megapixels
Resistance	Weatherproof
IP Camera series	GEMINI
Camera Type	Dome
Zoom type	Fixed
Operating humidity	0% RH ~ 95% RH
Operating temperature	-30°C ~ 60°C
Supported browsers	Internet Explorer 9 above
Approval and Compliance	CE, FCC,RoHS,IK10,IP66
Compatibility	ONVIF ,Profile S
Package Contents	FCS-3087 Screw Kit Resource CD (User Manual, Utility, 64-CH Monitoring Software)
Product weight (kg)	0.5
Dimensions (W x D x H)	111 x 111 x 82 mm
Color	White

EAN	4015867199343
Model Number	FCS-3087
Power supply	802.3af PoE, VDC12V
Power supply included	No
Resolution	50Hz: 20fps (2560×1920), 25fps (2048×1536), 25fps(1920×1080), 25fps(1280×720) 60Hz: 20fps (2560×1920), 30fps (2048×1536), 30fps(1920×1080), 30fps(1280×720)
Shutter time	1/3 s to 1/10,000 s
Standard	IEEE 802.3af Power over Ethernet (PoE) IEEE 802.1X Network Access Control TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour
Storage capacity	NAS (Support NFS,SMB/CIFS), ANR ,Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
Video format	H.264 / MJPEG
Weatherproof rating	IP66
Angle of view (°)	83
Audio format	G.711/G.722.1/G.726/MP2L2
Digital zoom	8X
Image sensor	1/3" Progressive Scan CMOS
Indicators	Power
IR cut filter	Yes
IR range	30 Meter
Lens	Board LENS 4mm, M12
Minimum illumination (lux)	0.01Lux @ (F1.2, AGC ON), 0 Lux with IR
Mount	Ceiling mount, Wall mount

