

Product datasheet

DULUX D/E 10 W/840

OSRAM DULUX D/E | CFLni, 2 tubes, with 4-pin base for ECG operation



Product datasheet

Technical data

Photometrical data

Color rendering index Ra	≥80
--------------------------	-----

Lifespan

Nominal lamp life time	20000 h
------------------------	---------

Additional product data

Appropriate disposal acc. to WEEE	Yes
-----------------------------------	-----


Certificates & standards

Energy efficiency class	G
-------------------------	---

Environmental information

Date of Declaration	10-11-2021
Primary Article Identifier	4050300017587
Candidate List Substance 1	No declarable substances contained
CAS No. of substance 1	No CAS
Declaration No. in SCIP database	No declarable substances contained

Light Distribution

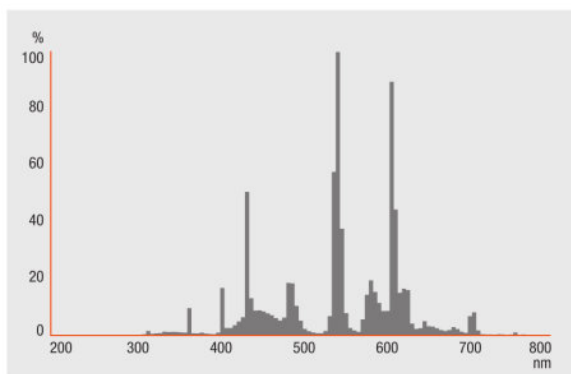


FL_840

Equipment / Accessories

- Suitable for operation on electronic control gear




SINGLE LAMP WITH ACCUTRONIC AT

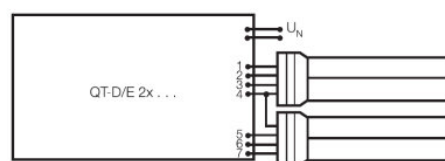

SERIES CONNECTION WITH QUICKTRONIC QT-DE

Product datasheet

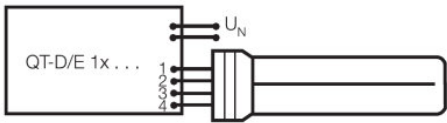

SINGLE LAMP WITH QUICKTRONIC QT-DE

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300017587	DULUX D/E 10 W/840	Shipping carton box 10 Pieces Folding carton box	186 mm x 133 mm x 82 mm	2.03 dm ³	428.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on QUICKTRONIC electronic control gear go to
▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

DULUX D/E 10 W/840

OSRAM DULUX D/E | CFLni, 2 tubes, with 4-pin base for ECG operation

Product name	Product name ECG	EAN	Nominal current	Nominal wattage + Power loss	Power factor λ [PIM]	Luminous flux at 25 °C
DULUX D/E 10 W/840	QT-ECO 1x4-16/220-240 S	4050300638584	0.08 A	11.50 W	0.60 c	600 lm
	QT-ECO 2x5-11/220-240 S	4050300821504	0.14 A	20.00 W	0.60 c	600 lm
	QTP-D/E 1x10-13	4008321181572	0.05 A	12.00 W	0.95	600 lm
	QTP-D/E 2x10-13	4008321181596	0.09 A	21.00 W	0.95	2*600 lm

Product name	Product name ECG	EAN	Number of lighting outlets	EEL – Energy Label
DULUX D/E 10 W/840	QT-ECO 1x4-16/220-240 S	4050300638584	1	A3
	QT-ECO 2x5-11/220-240 S	4050300821504	2	A2 BAT
	QTP-D/E 1x10-13	4008321181572	1	
	QTP-D/E 2x10-13	4008321181596	2	