
Pre-Installation

PLANNING INSTALLATION


Compare all the parts to the Hardware Included and Package Contents lists and verify that all the parts are included. Inspect all the parts for damage.


TOOLS REQUIRED


Silicone sealant


Safety goggles


Phillips screwdriver


Hammer


Jigsaw



Drill and drill bit



Plumber's putty

HARDWARE INCLUDED

NOTE: Hardware is not shown to actual size.

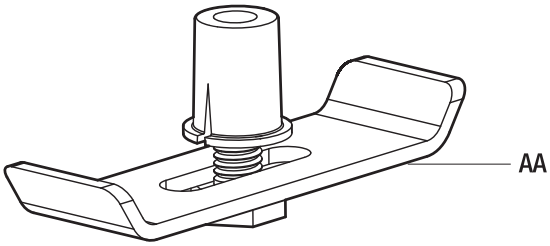


Part	Description
AA	Undermount clip

Undermount-Installation

1 Preparing the installation location


NOTICE: It is strongly suggested that you contact a professional countertop fabricator when installing the sink as an undermount.


- ☐ Provide appropriate clearance for the faucet, the water supply lines, the drain assembly, the garbage disposal and the structural parts of the cabinet.
- ☐ If your sink does not already have an existing installation location, place the cut-out template on the sink installation location and trace the locations to cut out.
- ☐ Cut out the location for the sink.

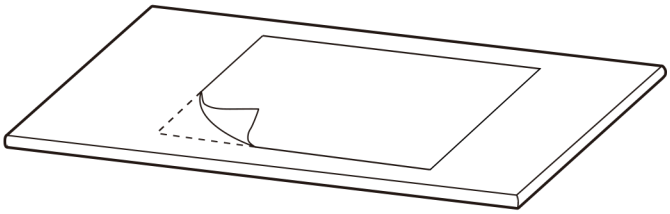



2 Installing the sink

- ☐ Locate and drill the mounting holes, following the countertop manufacturer's instructions. The holes should allow even spacing of the mounting brackets around the sink (A).
- ☐ With the countertop inverted (upside down), fasten the mounting brackets to the countertop loosely.
- ☐ Clean the bottom of the countertop and the top flange (or lip) of the sink (A).
- ☐ Apply a narrow bead of silicone adhesive sealant (not included) evenly all around the top of the sink flanges.
- ☐ Position and align the sink over the countertop opening. Press the silicone onto the countertop.
- ☐ Tighten the fasteners until the mounting brackets are snug against the sink. Check the alignment of the sink to the countertop opening.
- ☐ Tighten the fasteners evenly. Be careful not to over-tighten.
- ☐ Immediately remove any excess sealant.

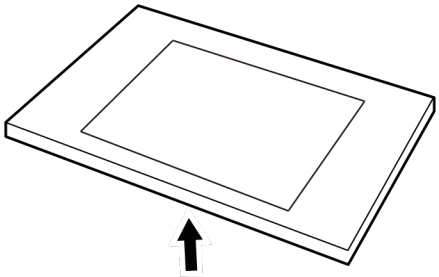

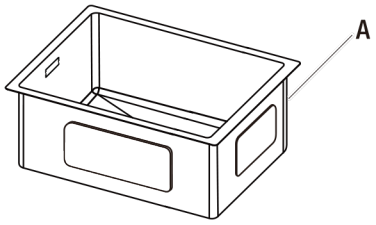

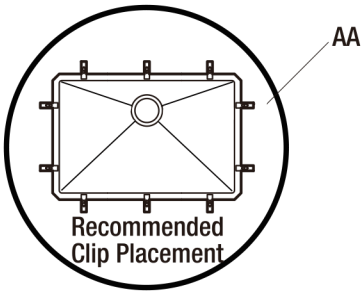


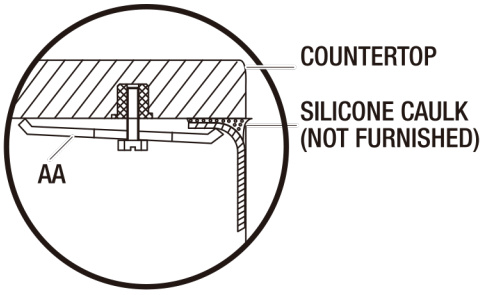

Undermount-Installation

3 Installing the drain assembly

- ☐ Place the sink (A) into the installation hole to verify the fit. Adjust the cutout if necessary.
- ☐ Install the strainer assembly (B-G) as these steps describe. It is easier to install the strainer assembly (B-G) to the sink (A) before the sink is installed to the cabinet.
  1) Apply a small amount of plumber's putty (not included) in the notch around the drain hole of the sink (A). Place the strainer ring (E) on top of the drain hole in the sink (A).
  2) Put strainer basket (C) into the strainer bowl (D), Close the lid(B) and place this assembly into the drain hole in the sink (A).
  3) From underneath the sink (A), place the paper washer (F)
  4) Tighten the locknut (G) to hold the strainer assembly securely in place.

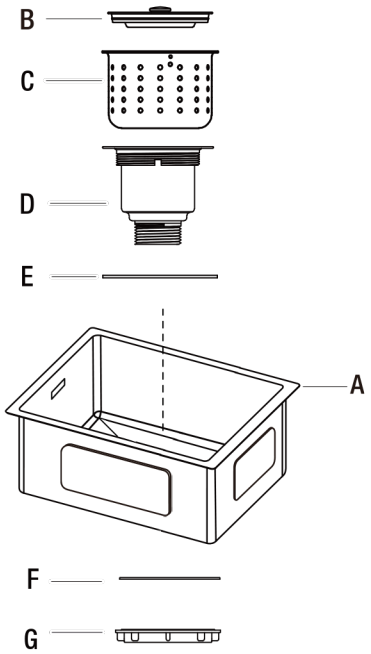

Care and Maintenance

- ☐ Do not use abrasive cleaning creams or powders, concentrated caustic soda, formic acid, or anything highly corrosive.
- ☐ Clean with a sponge or soft dish cloth and gentle sink soap. For stains that are difficult to remove, such as calcium deposits, use eraser sponges, vinegar-based cleaners, and lime removers.
- ☐ Rinse the sink with hot water and dry the sink with a soft absorbent cloth.
- ☐ Fruit juices, coffee, and tea can stain the surface of your sink if not removed. Rinse or wipe the sink promptly after these substances make contact with the sink.
- ☐ Never use steam or high-pressure cleaning systems to clean your sink.