




IT700

SMART THERMOSTAT

QUICK GUIDE

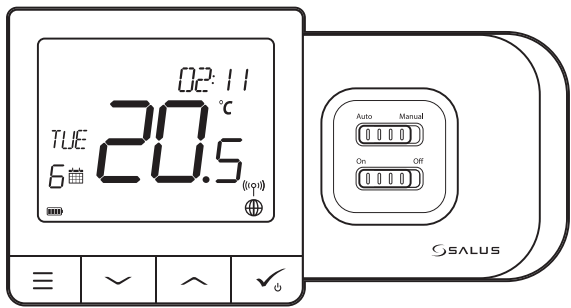

Introduction

The IT700 is an ultra-slim smart thermostat, just 11 mm thick, perfect for heating and cooling control. It uses Zigbee communication, has a rechargeable battery, and includes a magnetic wall plate and a desk stand. It is conveniently integrated in the SALUS Smart Home system.

Product Compliance


This product complies with the essential requirements and other relevant provisions of Directives GPSR 2023/988, RED 2025/138/EU, RoHS 2015/863 and 2017/2102 , REACH SVHC 253. The full text of the EU Declaration of Conformity is available at the following internet address: www.saluslegal.com.

2405-2480MHz; <20dBm (Wifi)

Safety Information

Use in accordance to national and EU regulations. Use the device as intended, keeping it in dry condition. Product for indoor use only. Installation must be carried out by a qualified person in accordance to national and EU regulations. Disconnect your equipment before cleaning it with a dry cloth.

LCD Icon Description

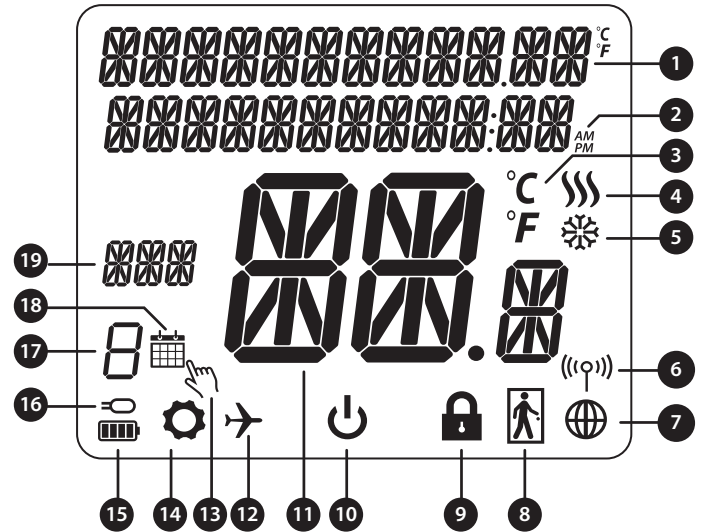

1. Menu/Settings description + Clock

2. AM/PM

3. Temperature unit

4. Heating indicator (icon is animating when there is heating demand)

5. Cooling indicator (icon is animating when there is cooling demand)

6. RF Connection indicator

7. Internet connection indicator

8. Occupancy sensor (hotel card)

9. Key lock function
10. Standby mode icon

11. Current Temperature / Setpoint Temperature

12. Holiday mode

13. Temporary override mode

14. Settings icon

15. Battery status indicator

16. External / Floor temp sensor indicator

17. Schedule program number


18. Schedule mode icon

19. Day indicator/ SET information

Buttons Description

Button	Function
	1) Menu button / Return button. 2) In the MAIN SCREEN: Press and hold for 3 sec to change the thermostat operating mode (Schedule mode / Permanent mode / Temporary override mode). 3) In the SETTINGS SCREEN: Press and hold for 3 sec to go back without saving the changes. 4) In the PAIRING SCREEN (in SYSTEM TYPE Menu): Press and hold for 3 sec to see other pairing options.
	„Down“ Button (Decrease parameter value/moving on the menu in ‘DOWN’ direction)
	“Up” Button (Increase parameter value/moving on the menu in ‘UP’ direction)
	1) Press and hold for 3 seconds to POWER UP new device 2) “OK / Tick” Button (Confirm parameter value / Go to the next menu / Save settings) 3) In the MAIN SCREEN: Press and hold for 3 seconds to enter Standby mode 4) In the SETTINGS SCREEN: Press and hold for 3 sec to go back to the MAIN SCREEN & SAVE all the changes. 5) During PAIRING process – hold button for 3 seconds to POWER OFF or REBOOT the thermostat
	In the MAIN SCREEN - press and hold these buttons together for 3 seconds to LOCK / UNLOCK the Thermostat keys).

Receiver buttons

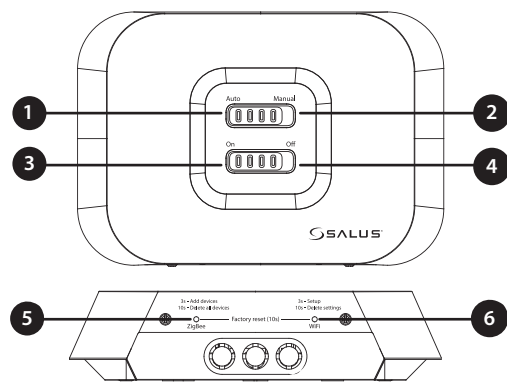

1. **AUTO** - Receiver operates in auto mode according to the thermostat.

2. **MANUAL** - Receiver output is controlled by the On/Off slide switch. (Manual ON can be disabled in the App)


3. **ON** - When in Manual Mode, ON will turn the boiler on.
4. **OFF** - Turn the boiler off, whether in Auto or Manual mode

5. **ZIGBEE**- ZigBee network configuration

6. **WIFI**- WiFi network configuration the On/Off slide switch. (Manual ON can be disabled in the App)

Note: Press and hold for 10 seconds the ZigBee and WiFi buttons to perform the Factory Reset.


Receiver LEDs

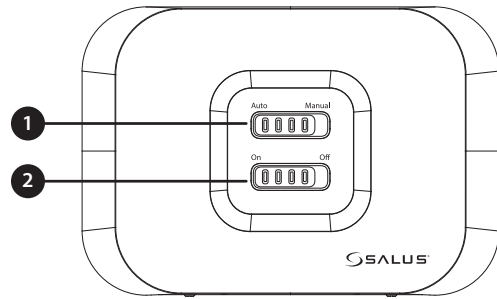

1 AUTO - MANUAL BUTTON	2 ON - OFF BUTTON
Connected to internet Steady blue	Cool demand Steady blue
Define internet connection Flasing blue	ZigBee network is open Flasing blue
Internet settings not defined Steady green	No heat/cool demand OR No devices linked with receiver Steady green
OTA in progress Flasing green	ZigBee network is in identifying mode Flasing green
Lost internet connection Flasing red	Heat demand Steady red
	During deleting all paired devices Flasing red



Wiring diagram

The IT700 is a wireless ZigBee thermostat which controls the pre-paired WZ600 Zigbee Wi-Fi Receiver, which has a single channel relay. It is the coordinator of the network, allowing devices to join the network and managing them thereafter.

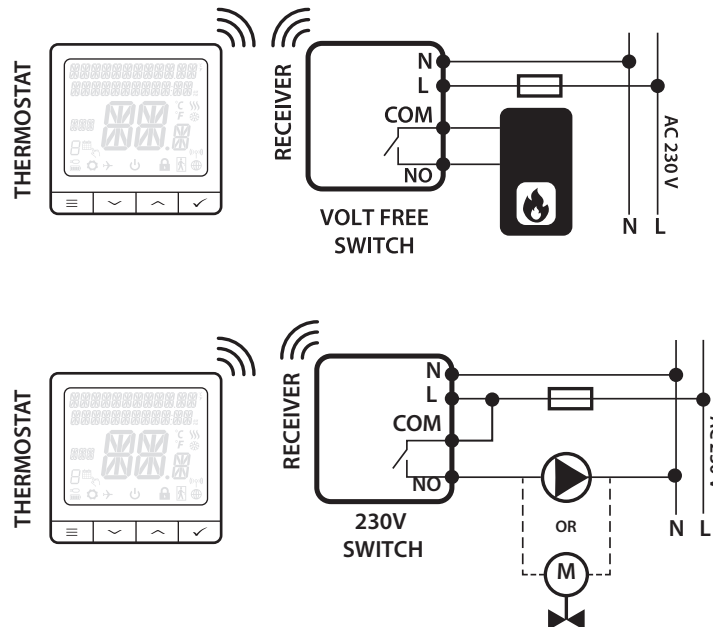


Pairing Process

Note:The thermostat and the receiver arrive pre-paired from the factory.
In case you need to pair again, please follow the steps below:

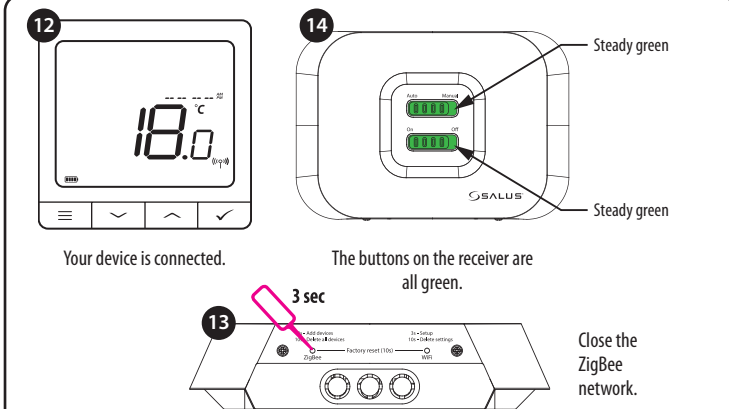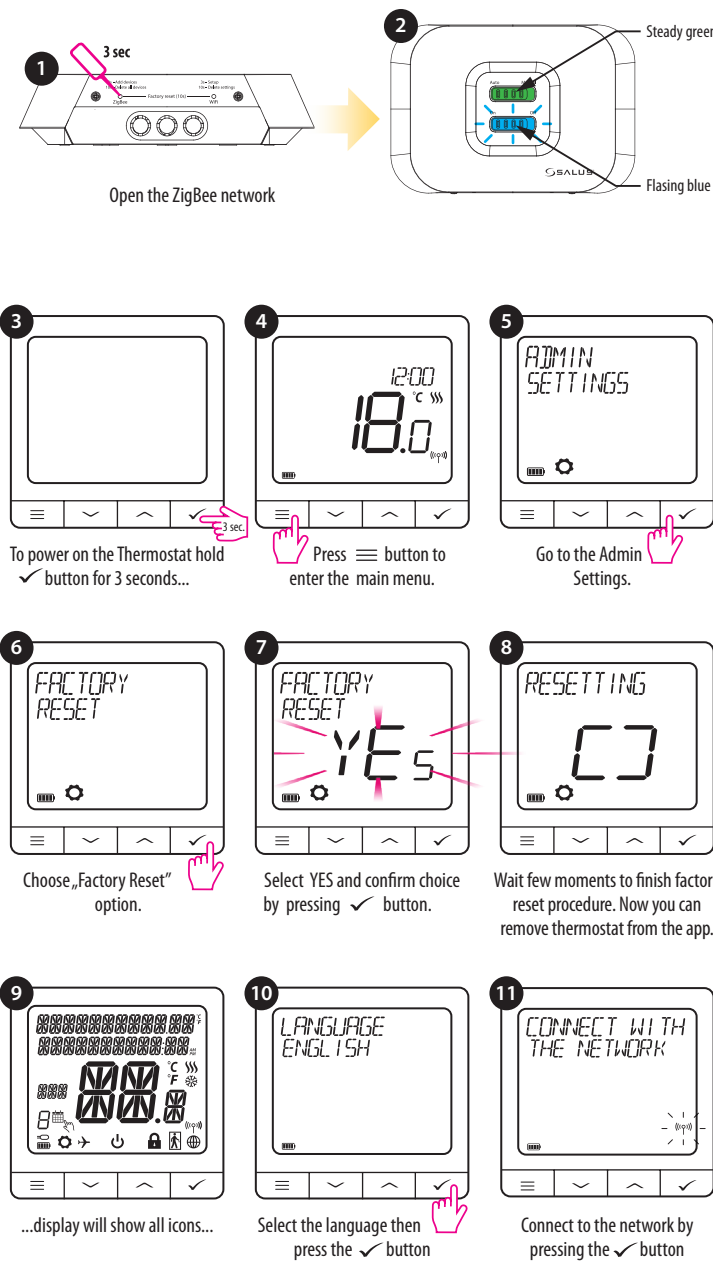

THERMOSTAT FUNCTIONALITIES:


First power up sequence

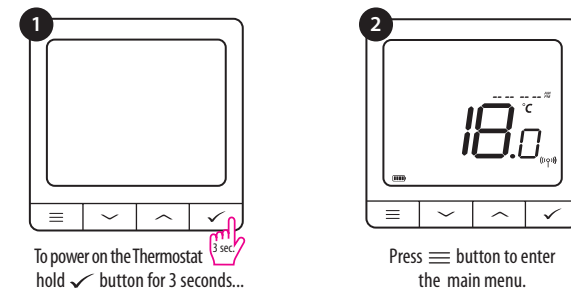

Operating modes

1. Changing from Manual mode to Schedule mode

IT700 thermostat is in manual mode by default. To change modes, press the button for 3 seconds to switch to Schedule Mode.

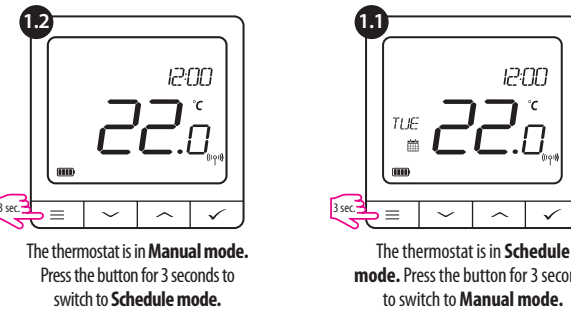

Manufacturer:

Units 8-10, Northfield Business Park, Forge Way,
Parkgate Rotherham, S60 1SD, United Kingdom

Importer:

Salus Controls European Distribution sp.z o.o.
ul. Szamocka 8, piętro 6., 01 748 Warszawa, Poland

UK: tech@salus-tech.com
DE / NL: info@salus-controls.de
PL: poland@saluscontrols.com
FR: technicalsupport@saluscontrols.fr
RO: tehnic@saluscontrols.ro
DK: Support@salus-controls.dk




www.saluscontrols.com


SALUS Controls is a member of the Computime Group.
Maintaining a policy of continuous product development SALUS Controls plc reserve the right to change specification, design and materials of products listed in this brochure without prior notice.

2. Standby mode


STANDBY mode is a special setpoint temperature which can be activated/deactivated in any time. It can work like a frost protection or overheating protection when needed. When standby mode is activated, the clock continues running (although it is not displayed), and the temperature sampling also continues. To enter **STANDBY mode** hold the button for 3 seconds on your thermostat. You can always turn off **STANDBY mode** by holding the button for 3 seconds again.

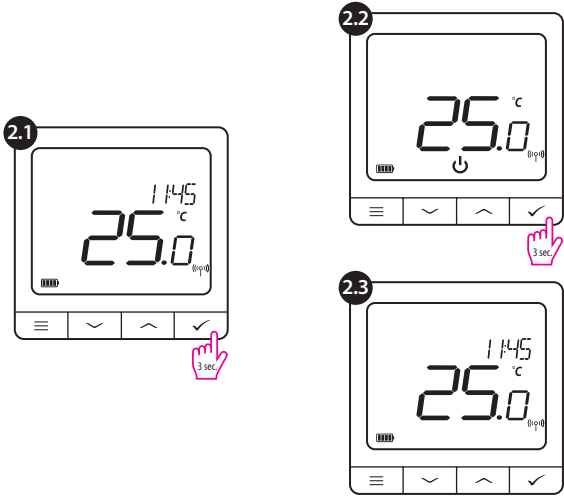


3. Schedule mode

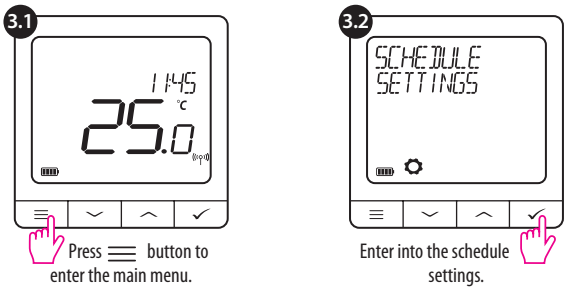


There are 3 possible schedule options. Use or buttons to select schedule variant and confirm by button

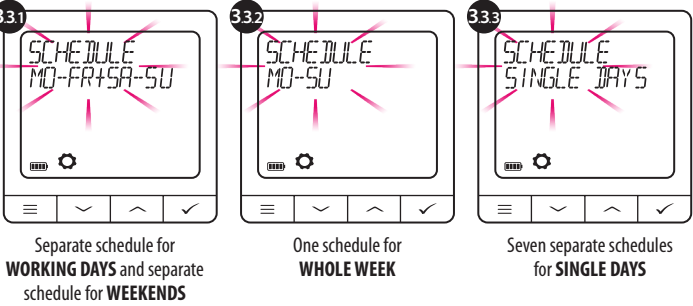

Schedule programming example for the WHOLE WEEK variant:

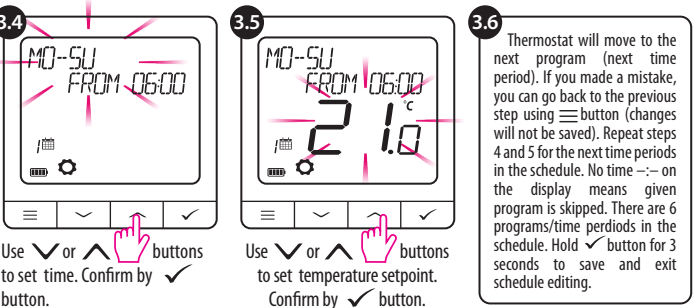

After setting the schedule thermostat is working in schedule mode. You can see calendar icon on the display:




*Default schedule in Offline mode


7 days (Monday to Sunday)		
Program	Time	Temperature
1	6:00	21 °C
2	23:00	19 °C

Heat / Cool Selection

IT700 thermostat can work in heating or cooling mode. To set thermostat operating mode please follow steps below:

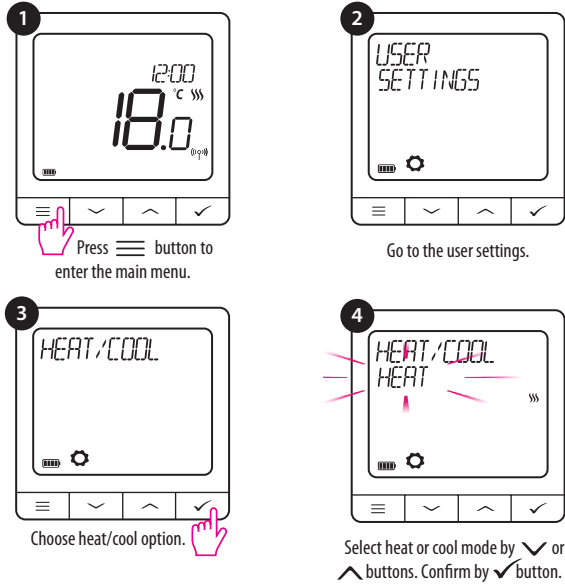


Advanced menu - RF signal

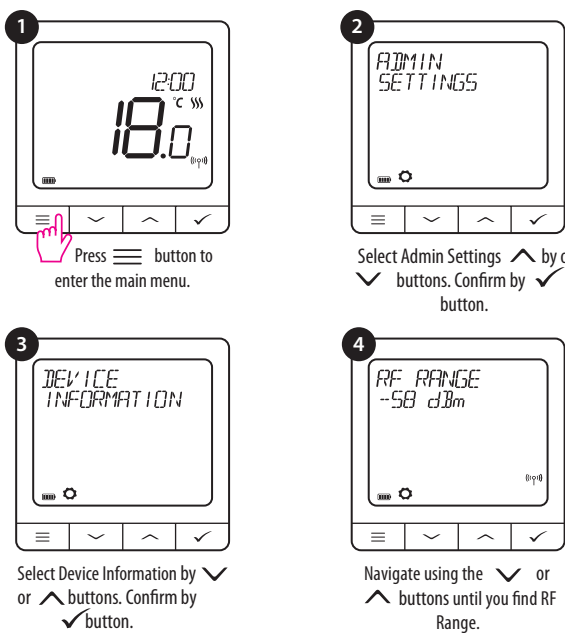

Factory Reset

To **RESET** IT700 thermostat to it's factory default settings please follow steps below:

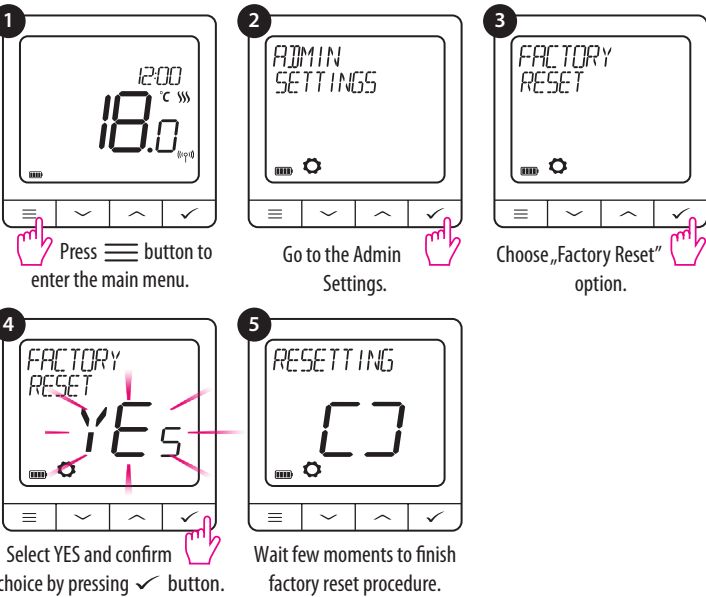

Connect your thermostat to the SALUS APP

Installation in Online Mode - Using Bluetooth
Power on the device, then follow these steps to gain control via the Salus Premium Lite app.

This product must be used with the SALUS Premium Lite application on mobile or web by accessing the following link:
eu.premium.salusconnect.io

