


N 50, flat screen hood, 90 cm, silver metallic

D49ED22X1

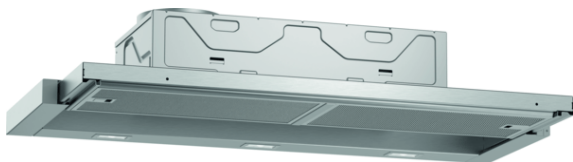

special accessories

Z54TC01X0	Standard odor filter (replacement requirement)
Z54TH90D1	Design handle strip
Z54TH90N1	Stainless steel handle bar
Z54TS01X0	Standard recirculation set

Flat screen hood: The flat screen hood is practically invisible in the wall unit and is ideal for clear kitchen fronts

- ✓ Efficient Silent Drive Motors - ensures very quiet cooking thanks to of the low-noise motor
- ✓ Intensive level: increases the fan output when there is a lot of cooking vapour
- ✓ LED light: good lighting when cooking thanks to the energy-saving LED lighting
- ✓ Integrated On/Off - the flat screen hood starts automatically by pulling out and stops by pushing back

Furnishing

Technical specifications

Type : pull-out hood

Approval certificates : CE, VDE Length of connection cable (cm) : 175

Niche dimensions (H x W x D) (mm) : 162mm x 526.0mm x 290mm Minimum distance to hob electric : 430

Minimum distance to hob Gas : 650 Net

weight (kg) : 10,170

Control : electronic

Max. fan output - exhaust air mode (m³/h) : 266 fan output at intensive level - recirculation mode : 178.0 Max. fan output - recirculation mode (m³/h) : 166 fan output at intensive level - exhaust air mode (m³/h) : 412 3

Sound power (dB(A) re 1 pW) : 63 Air outlet diameter (mm) : 120 / 150 Grease filter material : aluminium

EAN number : 4242004251170

Connected load (W) : 76

Fuse (A) : 10 Voltage (V) : 220-240

Frequency (Hz) : 50; 60 Type of plug :

Schuko-/Gardym.Earth Type of

installation : Integrable

'!2E20AE-cfbbha!

N 50, flat screen hood, 90 cm, silver metallic

D49ED22X1

Furnishing

design

- 90 cm
- Can be installed in a 60 or 90 cm wide wall unit
- Choice of exhaust air or recirculation mode
- A standard air recirculation set (special accessory) is required for recirculation mode

design

Comfort

- Short-stroke keys with LED display
- High, finely adjustable air output through electronic control via short-stroke keys with LED display
- Electronic control for high, finely adjustable air output
- Short-stroke keys (3 power levels and 1 intensive level) with LED display
- Automatic switching on and off when operating the telescopic rail or with the main switch
- Electronic controls on the side
- short-stroke keys
- 3 power levels and 1 intensive level
- Intensive levels with automatic reset
- Automatic fan run-on with digital display

- Even, bright lighting with 3 x 1.5W LED modules
- Color Temperature: 3500K
- Illuminance: 355 lux
- Cassette with aluminum frame
- Metal grease filter, dishwasher safe operating

mode and performance

- Fan performance in exhaust air mode according to EN 61591: max. normal level 266 m³/h, intensive level 412 m³/h
- Noise values according to EN 60704-2-13 with exhaust air operation: Max. normal level: 63 dB(A) re 1 pW Intensive level: 70 dB(A) re 1 pW
- noise min./max. Normal level: 50/63 dB
- 1 single flow lying, BLDC engine
- BLDC engine

planning and installation information

- Device dimensions (HxWxD): 203 x 898 x 290 mm
- Installation dimensions (HxWxD): 162 x 526 x 290 mm
- Exhaust nozzle Ø 150 mm (Ø 120 mm included)
- with backflow flap
- Length of connection cable: 1.75 m with plug
- without handle bar (available as special accessory)

environment and safety







- Energy efficiency class: A (on an energy efficiency class scale from A+++ to D)
- Average energy consumption: 22.2 kWh/year*
- Fan efficiency class: B*
- Lighting efficiency class: A*
- Grease filter efficiency class: C*
- Total connected load: 76 W

** According to EU regulation no. 65/2014*

N 50, flat screen hood, 90 cm, silver metallic

D49ED22X1

dimensional drawings

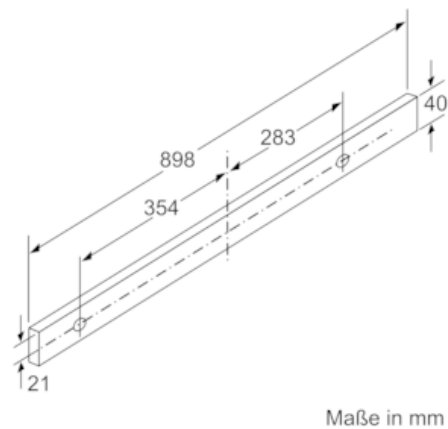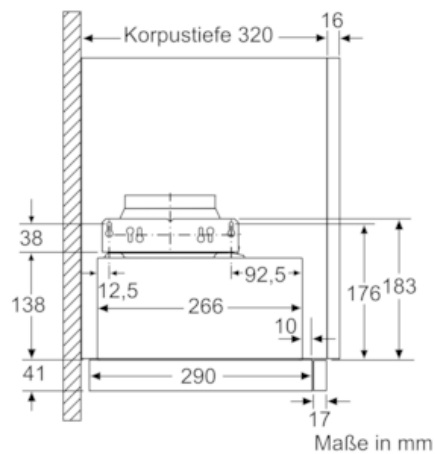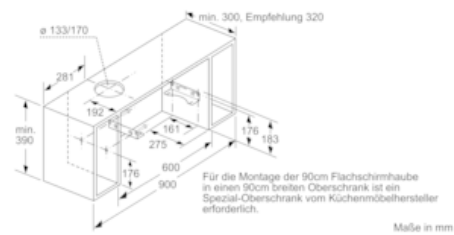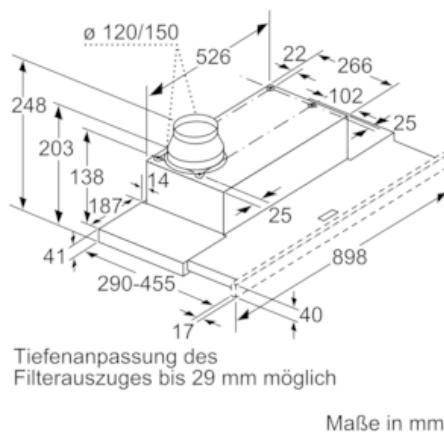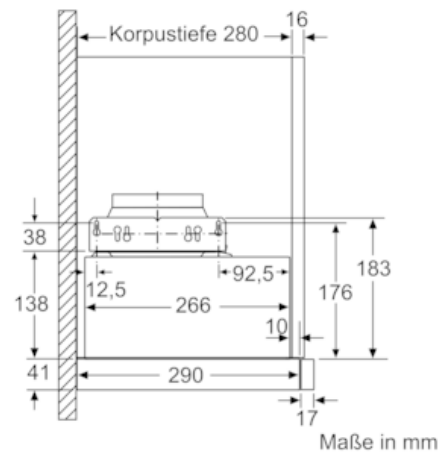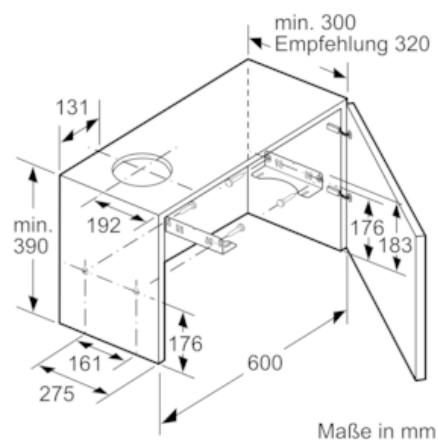

N 50, flat screen hood, 90 cm, silver metallic

D49ED22X1

dimensional drawings

