


GEMINI Zoom IP Network Camera, FCS-5060 2-Megapixel, two-way audio, 4X Optical Zoom, 802.3af PoE, Indoor/Outdoor

Product Images



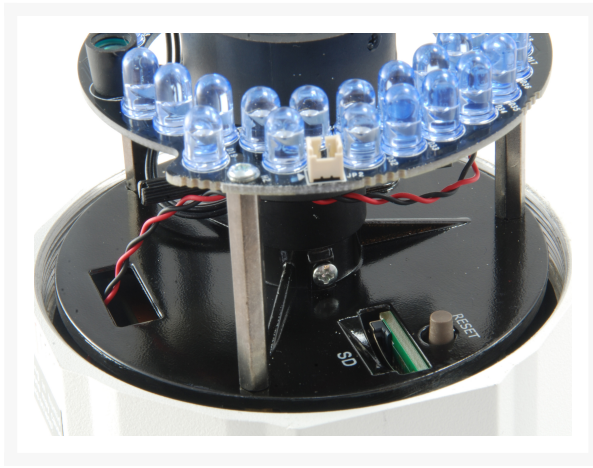

Short Description

- Weatherproof IP66-rated housing
- 2-Megapixel (1920 x 1080) high-definition resolution
- Video compression: H.264, MJPEG
- Features WDR (Wide Dynamic Range) to enhance visibility under extremely bright or dark environments
- Built-in infrared LEDs for night viewing up to 30m
- Digital input/output (1DI/1DO) for sensor and alarm
- Power support: PoE (IEEE 802.3af)
- Supports 4X optical zoom

Description

The LevelOne FCS-5060 is a fixed-position outdoor camera offering an ultra-reliable, cost-effective solution for outdoor IP surveillance networks, and is rated at IP66 to operate within rain, extreme heat, snow, dust and humid conditions. Offering clear, sharp imagery with 2-Megapixel resolution and the versatility of 802.3af standard PoE to transfer power and data via a single Cat.5 cable, the LevelOne FCS-5060 should be an essential part of any security deployment that requires smart, reliable outdoor cameras.

Additional Information

Fast Ethernet RJ45	10/100Mbps PoE(802.3 af)
Terminal block	DI/DO
Harmonized System (HS) code	852589
Customs product code (TARIC)	8525890000
Color	White
EAN	4015867199107
Model Number	FCS-5060
2-way audio	Yes
DI/DO	Yes
IR LED for night vision	Yes
Max. Resolution	2 Megapixels
Resistance	Weatherproof
IP Camera series	GEMINI
Camera Type	Bullet
Zoom type	Motorization
PoE Supported	Yes
Approval and Compliance	CE,FCC,ONVIF,RoHS
Compatibility	Internet Explorer 9.0 or above
Operating humidity	0% RH ~ 95% RH
Operating temperature	-30°C ~ 60°C
Supported browsers	Internet Explorer 9.0 or above
Package Contents	FCS-5060 Screw Kit Resource CD (User Manual, Utility, 64-CH Monitoring Software)
Angle of view (°)	106~35
Image sensor	1/2.8" Progressive Scan CMOS
Indicators	Power

IR cut filter	Yes
IR range	Up to 30 meter
Lens	CS-Mount 2.8 - 12 mm @ F1.4, motorization LENS,Auto Iris
Minimum illumination (lux)	0.01Lux @(F1.2,AGC ON), 0.014 Lux @(F1.4,AGC ON), 0 Lux with IR
Mount	Ceiling mount, Wall mount
Operating modes	Linux
Optical zoom	4X
Power supply included	No
Resolution	50Hz: 25fps(1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)
Shutter time	1/3s ~ 1/10,000s
Standard	IEEE 802.3 10-BASE-T, Ethernet IEEE 802.3u 100-BASE-TX, Fast Ethernet IEEE 802.3af Power over Ethernet (PoE) IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS,Unicast,IEEE802.1x
Video format	H.264 / MJPEG
Weatherproof rating	IP66
Dimensions (W x D x H)	95 x 105 x 258 mm
Product weight (kg)	1.2

