


## DELTA RGB DDR5

With a refreshing visual experience modeled after a stealth aircraft, the T-FORCE DELTA RGB DDR5 offers a 120°Ultra-Wide Lighting angle that supports lighting software from various manufacturers. In addition to support the latest Intel XMP3.0 one-click OC technology, the DELTA RGB DDR5 is also equipped with PMIC and on-die ECC to ensure stable, efficient power distribution across all components for system stability and performance.

## Main Feature

- RGB Colors & 120°Ultra-Wide Lighting
- Supports Intel XMP3.0 for One-Click Overclocking
- Power Management IC (PMIC) Equipped for Stable, Efficient
- Power Usage
- Strengthened PMIC Cooling Design
- On-die ECC for Stable System
- High-Quality ICs Selected for Stability & Reliability
- Equipped with Smart RGB IC Controller that Supports Various
- Lighting Effect Software

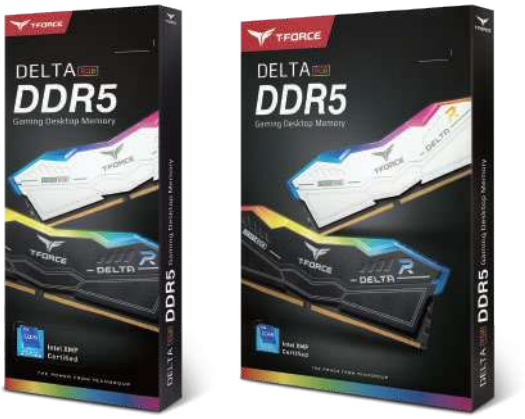


## Specification

| Module Type | DDR5 288 Pin Non-ECC Unbuffered DIMM | | | | | | |
|---|---|---|---|---|---|---|---|
| Frequency | 8000 | 7800 | 7600 | 7200 | 7000 | 6800 | 6600 |
| Capacity | 16GBx2 | 16GBx2 | 16GBx2 | 16GBx2 | 16GBx2 | 16GBx2 | 16GBx2 |
| Latency | CL38-48-48-84 | CL38-48-48-84 | 36-46-46-84 | 34-42-42-84 | 34-42-42-84 | 34-44-44-84 | 34-40-40-84 |
| Data Transfer Bandwidth | 64,000 MB/s (PC5-64000) | 62,400 MB/s (PC5-62400) | 60,800 MB/s (PC5 60800) | 57,600 MB/s (PC5 57600) | 56,000 MB/s (PC5 56000) | 54,400 MB/s (PC5 54400) | 52,800 MB/s (PC5 52800) |
| Voltage | 1.45V | 1.4V | 1.4V | 1.4V | 1.4V | 1.4V | 1.4V |
| Compatibility | Intel: 700 series | | | | | | |
| Dimensions | 46.1(H) x 144.2(L) x 7(W)mm | | | | | | |
| Warranty | Lifetime warranty | | | | | | |

Team Group Inc.
Tel: +886-2-82265000 Fax: +886-2-82265808
mail: sales@teamgroup.com.tw / rma@teamgroup.com.tw
www.teamgroupinc.com

## Specification

| Module Type | DDR5 288 Pin Non-ECC Unbuffered DIMM | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 6400 | 6200 | 6000 | 6000 | 6000 | 5600 |
| Capacity | 16GB<br>16GBx2 | 16GB<br>16GBx2 | 16GB<br>16GBx2 | 32GBx2 | 16GB<br>16GBx2 | 16GB<br>16GBx2 |
| Latency | 40-40-40-84 | 38-38-38-78 | 38-38-38-78 | 38-38-38-78 | 30-36-36-76 | 32-36-36-76 |
| Data Transfer Bandwidth | 51,200 MB/s<br>(PC5 51200) | 49,600 MB/s<br>(PC5 49600) | 48,000 MB/s<br>(PC5 48000) | 48,000 MB/s<br>(PC5 48000) | 48,000 MB/s<br>(PC5 48000) | 44,800 MB/s<br>(PC5 44800) |
| Voltage | 1.35V | 1.25V | 1.25V | 1.3V | 1.35V | 1.2V |
| Compatibility | Intel: 600 series, 700 series | | | | | |
| Dimensions | 46.1(H) x 144.2(L) x 7(W)mm | | | | | |
| Warranty | Lifetime warranty | | | | | |

| Module Type | DDR5 288 Pin Non-ECC Unbuffered DIMM | | | | |
|---|---|---|---|---|---|
| Frequency | 5600 | 5600 | 5600 | 5600 | 5200 |
| Capacity | 16GB<br>16GBx2 | 32GBx2 | 16GB<br>16GBx2 | 32GBx2 | 16GB<br>16GBx2<br>32GBx2 |
| Latency | 36-36-36-76 | 36-36-36-76 | 40-40-40-84 | 40-40-40-84 | 40-40-40-76 |
| Data Transfer Bandwidth | 44,800 MB/s<br>(PC5 44800) | 44,800 MB/s<br>(PC5 44800) | 44,800 MB/s<br>(PC5 44800) | 44,800 MB/s<br>(PC5 44800) | 41,600 MB/s<br>(PC5 41600) |
| Voltage | 1.2V | 1.3V | 1.2V | 1.3V | 1.25V |
| Compatibility | Intel: 600 series, 700 series | | | | |
| Dimensions | 46.1(H) x 144.2(L) x 7(W)mm | | | | |
| Warranty | Lifetime warranty | | | | |

## Ordering Information

| Color | Frequency | CAS Latency/Voltage | Capacity | IC Specifications | Team P/N |
|---|---|---|---|---|---|
| BLACK | DDR5-5200 ( PC5-41600 ) | CL40-40-40-76 1.25V | 16GB | x8 | FF3D516G5200HC40C01 |
| | DDR5-5600 ( PC5-44800 ) | CL32-36-36-76 1.2V | 16GB | x8 | FF3D516G5600HC3201 |
| | | CL36-36-36-76 1.2V | 16GB | x8 | FF3D516G5600HC36B01 |
| | | CL40-40-40-84 1.2V | 16GB | x8 | FF3D516G5600HC40B01 |
| | DDR5-6000 ( PC5-48000 ) | CL30-36-36-76 1.35V | 16GB | x8 | FF3D516G6000HC3001 |
| | | CL38-38-38-78 1.25V | 16GB | x8 | FF3D516G6000HC38A01 |
| | DDR5-6200 ( PC5-49600 ) | CL38-38-38-78 1.25V | 16GB | x8 | FF3D516G6200HC38A01 |
| | DDR5-6400 ( PC5-51200 ) | CL40-40-40-84 1.35V | 16GB | x8 | FF3D516G6400HC40B01 |

| Color | Frequency | CAS Latency/Voltage | Capacity | IC Specifications | Team P/N |
|---|---|---|---|---|---|
| WHITE | DDR5-5200 ( PC5-41600 ) | CL40-40-40-76 1.25V | 16GB | x8 | FF4D516G5200HC40C01 |
| | DDR5-5600 ( PC5-44800 ) | CL32-36-36-76 1.2V | 16GB | x8 | FF4D516G5600HC3201 |
| | | CL36-36-36-76 1.2V | 16GB | x8 | FF4D516G5600HC36B01 |
| | | CL40-40-40-84 1.2V | 16GB | x8 | FF4D516G5600HC40B01 |
| | DDR5-6000 ( PC5-48000 ) | CL30-36-36-76 1.35V | 16GB | x8 | FF4D516G6000HC3001 |
| | | CL38-38-38-78 1.25V | 16GB | x8 | FF4D516G6000HC38A01 |
| | DDR5-6200 ( PC5-49600 ) | CL38-38-38-78 1.25V | 16GB | x8 | FF4D516G6200HC38A01 |
| | DDR5-6400 ( PC5-51200 ) | CL40-40-40-84 1.35V | 16GB | x8 | FF4D516G6400HC40B01 |


Team Group Inc.
Tel: +886-2-82265000 Fax: +886-2-82265808
mail: sales@teamgroup.com.tw / rma@teamgroup.com.tw
www.teamgroupinc.com

## Ordering Information

| Color | Frequency | CAS Latency/Voltage | Capacity | IC Specifications | Team P/N |
|---|---|---|---|---|---|
| BLACK | DDR5-5200 ( PC5-41600 ) | CL40-40-40-76 1.25V | 16GBx2 | x8 | FF3D532G5200HC40CDC01 |
| | | | 32GBx2 | x8 | FF3D564G5200HC40CDC01 |
| | DDR5-5600 ( PC5-44800 ) | CL32-36-36-76 1.2V | 16GBx2 | x8 | FF3D532G5600HC32DC01 |
| | | CL36-36-36-76 1.2V | 16GBx2 | x8 | FF3D532G5600HC36BDC01 |
| | | CL36-36-36-76 1.3V | 32GBx2 | x8 | FF3D564G5600HC36BDC01 |
| | | CL40-40-40-84 1.2V | 16GBx2 | x8 | FF3D532G5600HC40BDC01 |
| | | CL40-40-40-84 1.3V | 32GBx2 | x8 | FF3D564G5600HC40BDC01 |
| | DDR5-6000 ( PC5-48000 ) | CL30-36-36-76 1.35V | 16GBx2 | x8 | FF3D532G6000HC30DC01 |
| | | CL38-38-38-78 1.25V | 16GBx2 | x8 | FF3D532G6000HC38ADC01 |
| | | CL38-38-38-78 1.3V | 32GBx2 | x8 | FF3D564G6000HC38ADC01 |
| | DDR5-6200 ( PC5-49600 ) | CL38-38-38-78 1.25V | 16GBx2 | x8 | FF3D532G6200HC38ADC01 |
| | DDR5-6400 ( PC5-51200 ) | CL40-40-40-84 1.35V | 16GBx2 | x8 | FF3D532G6400HC40BDC01 |
| | DDR5-6600 ( PC5-52800 ) | CL34-40-40-84 1.4V | 16GBx2 | x8 | FF3D532G6600HC34DC01 |
| | DDR5-6800 ( PC5-54400 ) | CL34-44-44-84 1.4V | 16GBx2 | x8 | FF3D532G6800HC34BDC01 |
| | DDR5-7000 ( PC5-56000 ) | CL34-42-42-84 1.4V | 16GBx2 | x8 | FF3D532G7000HC34ADC01 |
| | DDR5-7200 ( PC5-57600 ) | CL34-42-42-84 1.4V | 16GBx2 | x8 | FF3D532G7200HC34ADC01 |
| | DDR5-7600 ( PC5-60800 ) | CL36-46-46-84 1.4V | 16GBx2 | x8 | FF3D532G7600HC36DDC01 |
| | DDR5-7800 ( PC5-62400 ) | CL38-48-48-84 1.4V | 16GBx2 | x8 | FF3D532G7800HC38DDC01 |
| | DDR5-8000 ( PC5-64000 ) | CL38-48-48-84 1.45V | 16GBx2 | x8 | FF3D532G8000HC38DDC01 |

| Color | Frequency | CAS Latency/Voltage | Capacity | IC Specifications | Team P/N |
|---|---|---|---|---|---|
| WHITE | DDR5-5200 ( PC5-41600 ) | CL40-40-40-76 1.25V | 16GBx2 | x8 | FF4D532G5200HC40CDC01 |
| | | | 32GBx2 | x8 | FF4D564G5200HC40CDC01 |
| | DDR5-5600 ( PC5-44800 ) | CL32-36-36-76 1.2V | 16GBx2 | x8 | FF4D532G5600HC32DC01 |
| | | CL36-36-36-76 1.2V | 16GBx2 | x8 | FF4D532G5600HC36BDC01 |
| | | CL36-36-36-76 1.3V | 32GBx2 | x8 | FF4D564G5600HC36BDC01 |
| | | CL40-40-40-84 1.2V | 16GBx2 | x8 | FF4D532G5600HC40BDC01 |
| | | CL40-40-40-84 1.3V | 32GBx2 | x8 | FF4D564G5600HC40BDC01 |
| | DDR5-6000 ( PC5-48000 ) | CL30-36-36-76 1.35V | 16GBx2 | x8 | FF4D532G6000HC30DC01 |
| | | CL38-38-38-78 1.25V | 16GBx2 | x8 | FF4D532G6000HC38ADC01 |
| | | CL38-38-38-78 1.3V | 32GBx2 | x8 | FF4D564G6000HC38ADC01 |
| | DDR5-6200 ( PC5-49600 ) | CL38-38-38-78 1.25V | 16GBx2 | x8 | FF4D532G6200HC38ADC01 |
| | DDR5-6400 ( PC5-51200 ) | CL40-40-40-84 1.35V | 16GBx2 | x8 | FF4D532G6400HC40BDC01 |
| | DDR5-6600 ( PC5-52800 ) | CL34-40-40-84 1.4V | 16GBx2 | x8 | FF4D532G6600HC34DC01 |
| | DDR5-6800 ( PC5-54400 ) | CL34-44-44-84 1.4V | 16GBx2 | x8 | FF4D532G6800HC34BDC01 |
| | DDR5-7000 ( PC5-56000 ) | CL34-42-42-84 1.4V | 16GBx2 | x8 | FF4D532G7000HC34ADC01 |
| | DDR5-7200 ( PC5-57600 ) | CL34-42-42-84 1.4V | 16GBx2 | x8 | FF4D532G7200HC34ADC01 |
| | DDR5-7600 ( PC5-60800 ) | CL36-46-46-84 1.4V | 16GBx2 | x8 | FF4D532G7600HC36DDC01 |
| | DDR5-7800 ( PC5-62400 ) | CL38-48-48-84 1.4V | 16GBx2 | x8 | FF4D532G7800HC38DDC01 |
| | DDR5-8000 ( PC5-64000 ) | CL38-48-48-84 1.45V | 16GBx2 | x8 | FF4D532G8000HC38DDC01 |

※ The frequency and stability of the overclocking memory when au tomatic reading of the overclocking value (XMP or EXPO) is turn ed on will vary depending on the difference between the motherboard and CPU. Check "Product Compatibility I nquiry" before purchase for further info
https://www.teamgroupinc.com/en/support/compatibility.php
※ We reserve the right to modify product specifications without p rior notice.