



MASTER LEDtube EM/ Mains T8

MAS LEDtube Sensor 1500mm HO 24W865 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. This product is the ideal solution for up lighting in general lighting applications.

Warnings and Safety

• –

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Nominal lifetime	50,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	240 degree(s)
Luminous Flux	3,100 lm
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	129.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	83
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	24 W
Lamp Current (Max)	118 mA
Lamp Current (Min)	98 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	60 °C
Controls and Dimming	
Dimmable	Yes

MASTER LEDtube EM/Mains T8

Mechanical and Housing	
Bulb Material	Glass
Product Length	1,500 mm
Bulb Shape	Tube, double-ended

Approval and Application


Energy Saving Product	Yes
Approval Marks	CE marking RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	24 kWh

Product Data

Order product name	MAS LEDtube Sensor 1500mm HO 24W865 T8
--------------------	--


Full product name	MAS LEDtube Sensor 1500mm HO 24W865 T8
Full product code	871869680608100
Order code	929001878802
Material Nr. (12NC)	929001878802
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696806081
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696806098

Dimensional drawing

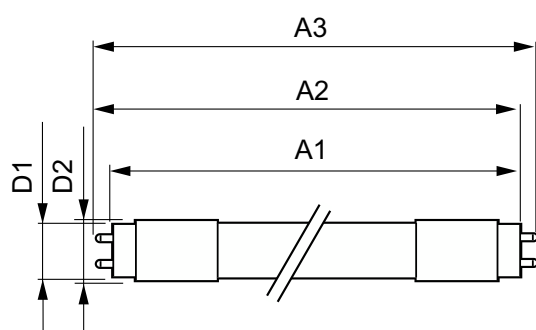


Product	D1	D2	A1	A2	A3
MAS LEDtube Sensor 1500mm HO 24W865 T8	25.8 mm	28 mm	1,500 mm	1,507.1 mm	1,514.2 mm

Photometric data




Light Distribution Diagram - MAS LEDtube Sensor 1500mm HO 24W865 T8

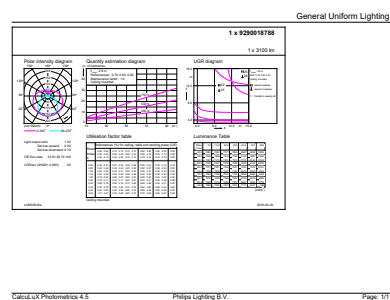

General uniform lighting - MAS LEDtube Sensor 1500mm HO 24W865 T8


MASTER LEDtube EM/Mains T8

Photometric data




Spectral Power Distribution Colour - MAS LEDtube Sensor 1500mm HO 24W865 T8


Lifetime

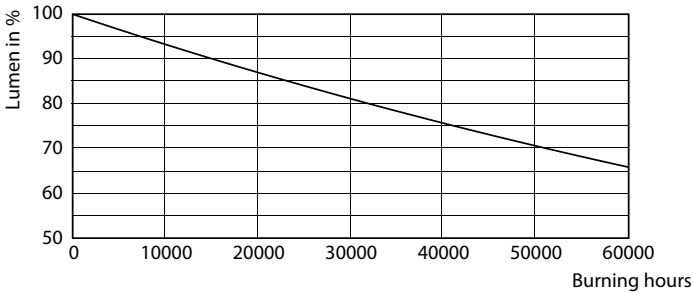


Lumen Maintenance Diagram - MAS LEDtube Sensor 1500mm HO 24W865 T8

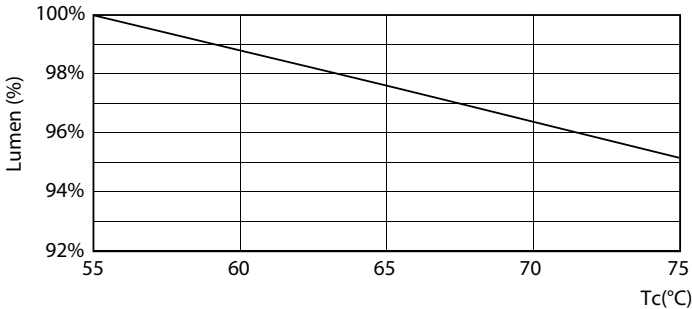

Lumen Maintenance Diagram - MAS LEDtube Sensor 1500mm HO 24W865 T8

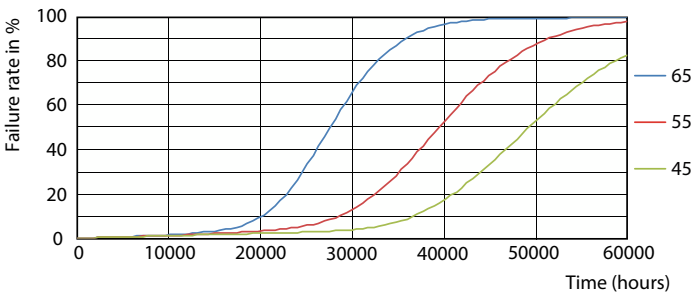


Life Expectancy Diagram - MAS LEDtube Sensor 1500mm HO 24W865 T8

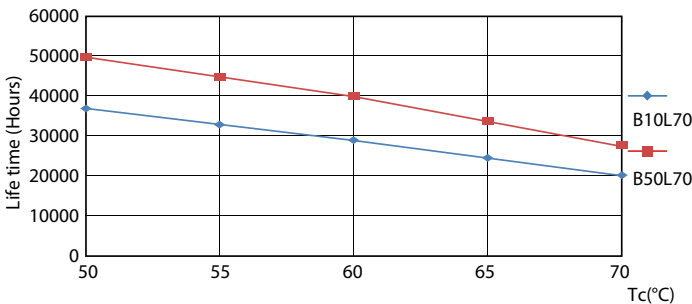

Life Expectancy Diagram - MAS LEDtube Sensor 1500mm HO 24W865 T8

MASTER LEDtube EM/Mains T8

Lifetime

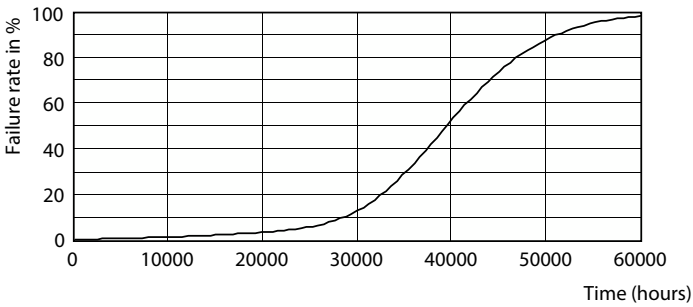

Life Expectancy Diagram - MAS LEDtube Sensor 1500mm HO 24W865 T8

