

Key Features

Bright Images in Large SpacesLong-Lasting Laser Phosphor

Light SourceReliable 24/7 Operation360-Degree

OrientationPeace of Mind



Product Description


Bright and versatile for any professional installation, the ViewSonic LS750WU WUXGA laser projector delivers everything you need for big screens in big venues. Delivering 5,000 lumens of advanced high brightness, 300,000:1 contrast ratio, and up to 20,000 hours* of light source life, this projector is ideal for auditoriums, lecture halls, large boardrooms, houses of worship, and more. Thanks to SuperColor™ technology, content is brought to life with captivating color, crisp graphics, and stunning videos no matter the environment. This top-notch performer is also easy to deploy and manage with its wide 1.3x optical zoom adjustment, vertical/horizontal keystone, and 4-corner adjustment that provides extreme flexibility in even the most challenging installations. Moreover, 360-degree tilt angle projection and 24/7 operation allow for extreme mounting flexibility. The ViewSonic® LS750WU is the ideal WUXGA laser projector for professional installations, large venues, and business and education environments. *Light source life may vary based on actual usage and other factors.



- 01. IR remote sensor
- 02. Projection lens
- 03. Elevation feet
- 04. Control Panel


- 05. Power Button
- 06. Zoom/Focus
- 07. USB 2.0 Type A
- 08. HDMI x2

- 09. AC In
- 10. Kensington Lock Slot
- 11. VGA
- 12. Monitor Out

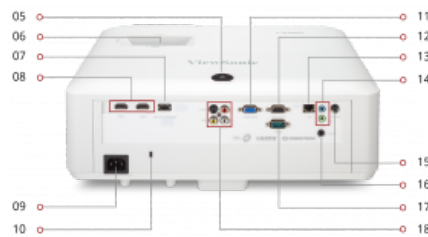

- 13. LAN
- 14. Audio In/Out
- 15. 3D VESA (Sync)
- 16. 12V Trigger


- 17. RS232
- 18. Composite AV In



1920 x 1200
RESOLUTION



5,000 ANSI
LUMENS



1.13-1.47
THROW RATIO

Contact Sales

call: 888.881.8781

email: salesinfo@viewsonic.com

visit: viewsonic.com

Display:	
Type:	DLP Laser
Resolution Type:	WUXGA (1920x1200)
Resolution:	1920 x 1200
Brightness (Lumens):	5,000 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	2.4 - 31.2 ft / 0.7 - 9.5 m
Throw Ratio:	1.13-1.47
Keystone:	Vertical (+/- 40°) / Horizontal (+/- 40°)
Lens:	1.3x optical zoom
Light Source (watt):	Nichia 67W X 2
Light Source Life, Normal (hours):	20000
Light Source Life, Dynamic Eco-Mode (hours):	20000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	3,000,000:1
Aspect Ratio:	16:10
Video Signal:	
Frequency Horizontal:	15K-102KHz
Frequency Vertical:	23-120Hz
Compatibility:	
PC Resolution (max):	1920 x 1200
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1200
Mac® Resolution (min):	640 x 480
Connector:	
USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm 12V Trigger(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS-232)(1), HDMI 1.4 (with HDCP 1.4)(2), VGA In(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1), RCA Audio In (L/R)(1), 3D VESA(1)	
Audio:	
Internal Speakers:	10W (x2)
Controls:	
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
Operating Conditions:	
Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%
Additional Hardware:	
Kensington Lock Slot:	1

Weight (imperial):	
Net (lbs):	13.0
Gross (lbs):	18.5
Weight (metric):	
Net (kg):	5.9
Gross (kg):	8.4
Dimensions (imperial) (WxHxD):	
Packaging (in.):	20.3 x 19.3 x 10.9
Physical (in.):	15.9 x 12.0 x 5.7
Dimensions (metric) (WxHxD):	
Packaging (mm):	515.0 x 490.0 x 276.0
Physical (mm):	405.0 x 305.0 x 145.0
General:	
Regulations: FCC, cTUVus, ROHS	
PACKAGE CONTENTS: LS750WU projector, Power Cable, VGA Cable, Remote Control, Quick Start Guide	
Warranty: Five-year limited warranty on parts and labor, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).	
Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.	
UPC: 766907003048	
Accessories:	
IFP2410, IFP2710, PGD-350, PJ-SCW-1001W, PJ-WMK-006, PJ-WMK-007, VBS100-A, VC10, VCB10, VSR100	