


FCS-3403 GEMINI Fixed Dome IP Camera, 4-MP, H.265

Product Images



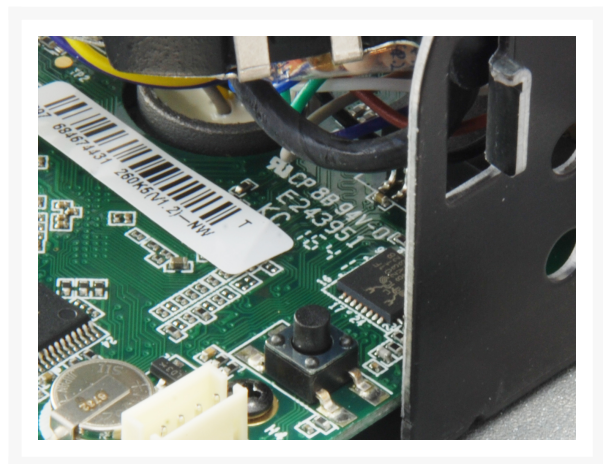

Short Description

- Features WDR (Wide Dynamic Range) to enhance visibility under extremely bright or dark environments
- Free CMS (Central Management System) software with 64-channel license
- Built-in Micro SD/SDHC/SDXC card slot for local storage
- Built-in infrared LEDs for night viewing up to 30m
- 4-Megapixel high-definition resolution
- Video compression: H.264, H.265, MJPEG
- Weatherproof IP67-rated housing

Description

The LevelOne FCS-3403 is a fixed-position outdoor camera offering an ultra-reliable, cost-effective solution for outdoor IP surveillance networks, and is rated at IP67 to operate within rain, extreme heat, snow, dust and humid conditions. Offering clear, sharp imagery with 4-Megapixel resolution and the versatility of 802.3af standard PoE to transfer power and data via a single Cat.5 cable, the LevelOne FCS-3403 Should be an essential part of any security deployment that requires smart, reliable outdoor cameras.

Additional Information

Harmonized System (HS) code	852589
Customs product code (TARIC)	8525890000
Features	One-key reset, anti-flicker, three streams, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS 1.2, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for ONVIF, TLS1.2
PoE Supported	Yes
2-way audio	Yes
DI/DO	Yes
IR LED for night vision	Yes
Max. Resolution	4 Megapixels
Resistance	Weatherproof
IP Camera series	GEMINI
Camera Type	Dome
Zoom type	Fixed
Operating temperature	-30°C ~ 60°C
Supported browsers	IE 9.0 or newer, Firefox with VLC, Chrome with VLC, Safari with QuickTime Plug-in required live view: IE9+ Plug-in free live view: Chrome 57.0+, Firefox 52.0+, Safari 11+ Local Service: Chrome 41.0+, Firefox 30.0+
Storage temperature	0°C ~ 95°C
Approval and Compliance	CE,FCC,TVS 2000V Lightning Protection, Surge Protection and Voltage Transient Protection,IP67,IK10,RoHS
Package Contents	FCS-3403 Screw Kit Quick Installation Guide Resource CD (User Manual, Utility, QIG)
Product weight (kg)	0,5
Dimensions (W x D x H)	111 x 111 x 82 mm

Color	White
EAN	4015867207703
Model Number	FCS-3403
Power consumption	12 VDC, 0.7 A, max. 8.5W, ? 5.5mm coaxial plug power PoE (802.3af, 36V to 57V), 0.3 A to 0.1 A, max. 10W
Power supply included	No
Resolution	Main Stream: 50Hz:25fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2688 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080, 1280 × 720) Sub Stream: 50Hz: 25fps (640 × 480, 640 × 360, 320 × 240) 60Hz: 30fps (640 × 480, 640 × 360, 320 × 240) Third Stream: 50Hz: 25fps (1280 × 720, 640 × 360, 352 × 288), 60Hz: 30fps (1280 × 720, 640 × 360, 352 × 240)
Shutter time	1/3 s to 1/100,000 s
Standard	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour, SSL/TLS, WebSocket, WebSockets
Storage capacity	Built-in MicroSD/SDHC/SDXC slot, up to 128G
Video format	H.265/H.264/MJPEG
Weatherproof rating	IP67
Angle of view (°)	Horizontal field of view: 86 Vertical field of view: 46 ¹ Diagonal field of view: 102 ¹
Audio format	G722.1/G711ulaw/G711alaw/G726/MP2L2/PCM
Image sensor	1/3" Progressive Scan CMOS
Indicators	Power
IR cut filter	Yes
IR range	Up to 30 meter
Lens	Lens Mount:M12 4 mm @F2.0
Minimum illumination (lux)	Color: 0.01 Lux @ (F1.2, AGC ON), 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR

