

ShowerTablet Select

Shower thermostat 400 for exposed installation

Finish: **Chrome** Article Number: **24360000**



Description

product features

- 1 function
- temperature and water flow control
- Select push-button on/off control for 1 outlet
- slider integrated in the shelf
- water flow control with stop function
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- thermostat cartridge, Start/stop valve to operate the functions
- maximum flow rate at 3 bar: 16,3 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- with isolated water conduction
- non-return valve
- with silencer
- suitable for continuous flow water heaters
- shelf made of plastic
- surface shelf: graphite
- material handles: plastic
- centre distance: 150 ± 12 mm
- connection dimension: DN15
- connection type: S-connections, G 1/2
- dirt filter included
- thermostat is delivered with button hand shower

Technology



Design awards




reddot winner 2021



Product image




Scale drawing

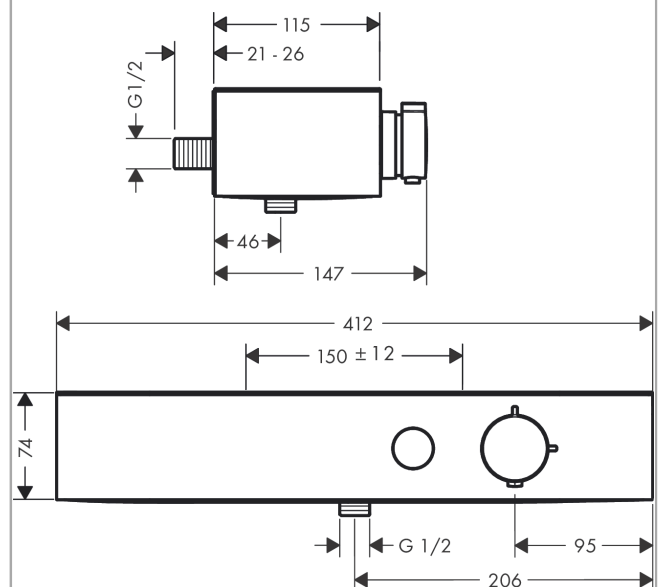

ShowerTablet Select
Shower thermostat 400 for exposed installation
 Finish: **Chrome** Article Number: **24360000**



Flowchart




ShowerTablet Select
Shower thermostat 400 for exposed installation
 Finish: **Chrome** Article Number: **24360000**



Exploded Drawing

Year of production: >04/22

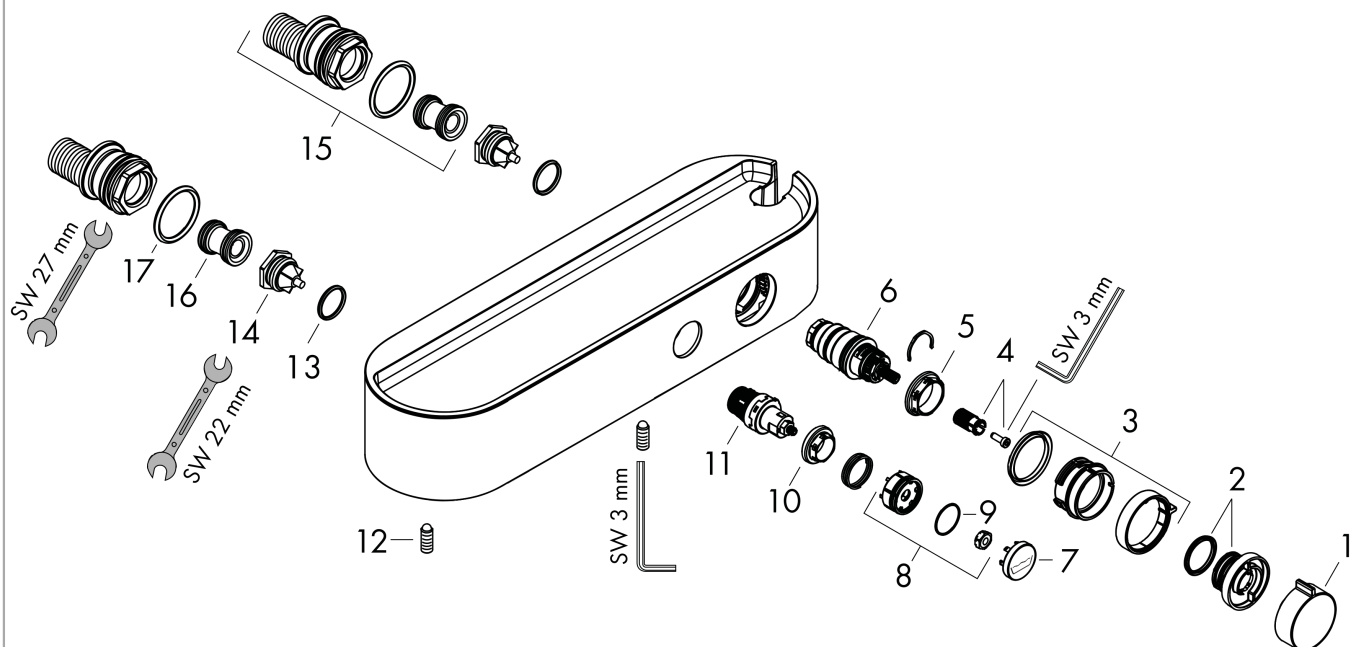

ShowerTablet Select
Shower thermostat 400 for exposed installation
 Finish: **Chrome** Article Number: **24360000**



Spare part list

Year of production: >04/22

Pos.	Description	Article Number	PC	PU
1	handle	94403000	9	1
2	safety set	94404000	9	1
3	handle	94405000	7	1
4	handle fixing set	93228000	3	1
5	nut	98913000	6	1
6	thermostat cartridge	98282000	14	1
7	set of symbols	98367000	10	1
8	spring with sleeve	92340000	4	1
9	O-ring 20x1	98140000	1	1
10	nut	98368000	4	1
11	shut off unit	95758000	14	1
12	hollow set screw M6x16 including o-ring 29x3	98372000	3	1
13	O-ring 17x2	98199000	1	1
14	non return valve (pressure-resistant up to 2 MPa)	95773000	8	1
15	set of S-unions	95772000	13	1
16	noise reduction	96429000	2	1
17	O-ring 29x3	98371000	2	1
a	cartridge for exchanged connections	92373000	18	1
b	adapter for ball S - union	02026000	99	1