



Open Frame Touch Monitor

HO 165 PGB

15.6" / 39,6cm Diagonal
LED Backlight – Format 16:9


- 1920 x 1080 Resolution Full HD 1080P
- 10-Point Touch P-Cap Technology
- High Brightness 500 cd/m² Panel
- 178° / 178° Ultra-Wide Viewing Angle
- Triple Input: HDMI + DP + VGA
- **IP65 Rating Level**
- **Display Protection: Thickness 7.3mm**
- **24/7 Operating**
- **50.000 Hours Backlight Lifetime**
- **Built-in Speakers**
- 12 Volt External Power Supply
- Multiple Mounting Options
- Operating Temperature: -10~60°C

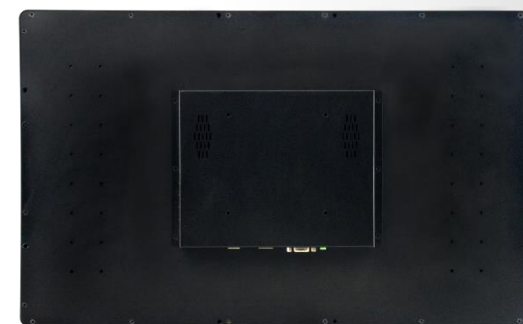

15.6" / 39,6 cm

Part. No.: HO 165 PGB

SIZE, RESOLUTION



15.6"
16:9 Aspect Ratio



Full HD
1920 x 1080

CONNECTIVITY, IP LEVEL



VGA
HDMI
Display Port



IP 65
Water & Dust
Protection

VIEWING ANGLE, VESA



178° Ultra-Wide
Viewing Angle



VESA
Wall-Mountable

OTHER FEATURES



Operating
24 Hours / 7 Days



50.000 Hours
Lifetime

HO 165 PGB 15.6" Open Frame Touch Monitor

Display Size	39.6 cm / 15.6" Diagonal
Panel Type	TFT – LED Backlight, IPS Panel Type
Aspect Ratio	16:9
Resolution (H x V)	1920 x 1080 Full HD
Brightness	500 cd/m ² (Panel) – 425 cd/m ² (Monitor)
Contrast (Typ.)	1000:1 (Typical) – 10M:1 (Active Contrast)
Display Area	345,23 x 194,54 mm
Viewing Angle L/R; U/D	178° H / 178° V (CR > 10)
Response Time	25 msec
Pixel Pitch	0.17925 (H) X 0.17925 (V) mm
Touch Type	Projected Capacitive Type – 10 Point Touch Material Glass + Glass Cover Glass+LOCA+ITO (Indium Tin Oxide) Glass
Display Colors	16.2M Colors
Horizontal Frequency	31.5 ~ 80 kHz
Vertical Frequency	60 ~ 75 Hz
Max Display Frequency	1920 x 1080 @ 60Hz
Input 1	VGA
Input 2	HDMI
Input 3	Display Port / USB for Touch
Speakers	Yes, 1.5W x 2
Power Consumption	On: 35W; Stand-by: 0,5W; Off: 0,3W (TBC)
AC Power Range	External Power Supply: 12 Volt / 2.5A Input: AC 100 ~ 240 Volt; 50 ~ 60 Hz
Product Dimensions	387 x 45 x 236 mm (W x D x H)
Packing Dimensions	- x - x - mm (W x D x H) (TBC)
Net / Gross Weight	3,4 Kg / N/A Kg

VESA Mounting	100 x 100 mm
Display Protection	TP Module Protection Thickness 7,3mm
Hardness / Transmittance	≥6H Toughened hard panel surface / ≥85%
IP Rating Level	IP 65 (Front), Water and Dust Protection *
Control	Menu/Exit,Bri (+),Vol (-) , Input/Enter,Power
LED Backlight life	50.000 hours
Accessory	Power Adaptor; USB 2.0 (B-A) Cable for Touch (1.8mt).
Certifications	CE, RoHS, EU Energy Label
On Screen Display	8 Languages
Color	9300, 6500, 5300, User Mode
Preset Mode	Standard, Text, Movie, Game Modes
Operating Temperature	-10~60°C

PART. NO.:
HO 165 PGB

HANNspree

HO 165 PGB
15.6" Open Frame Touch Monitor



Experts in **Display**



HANNSpree

HO 165 PGB 15.6" Open Frame Touch Monitor

Experts in **Display**

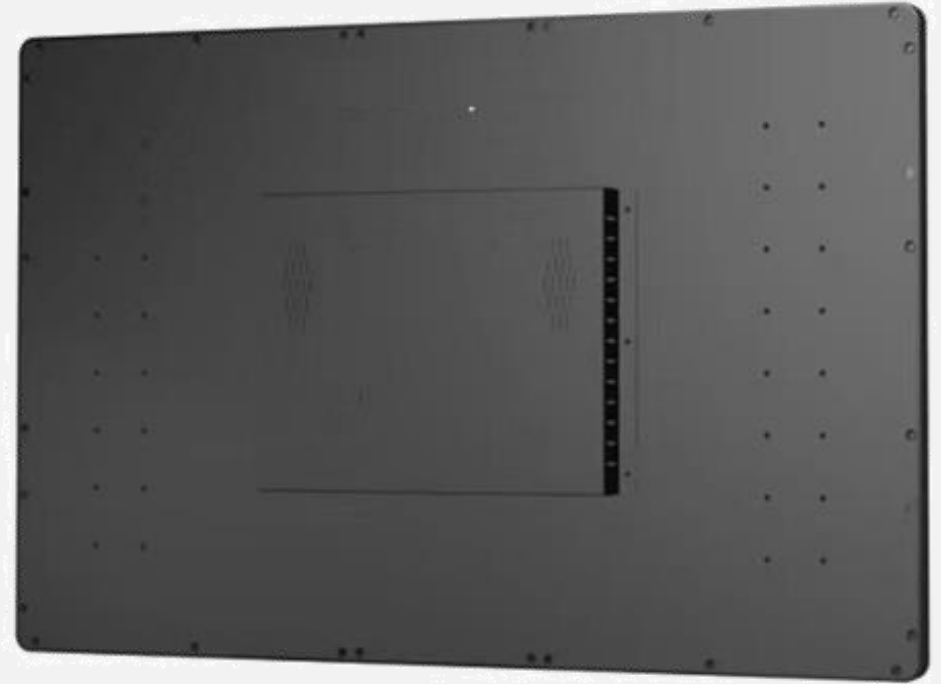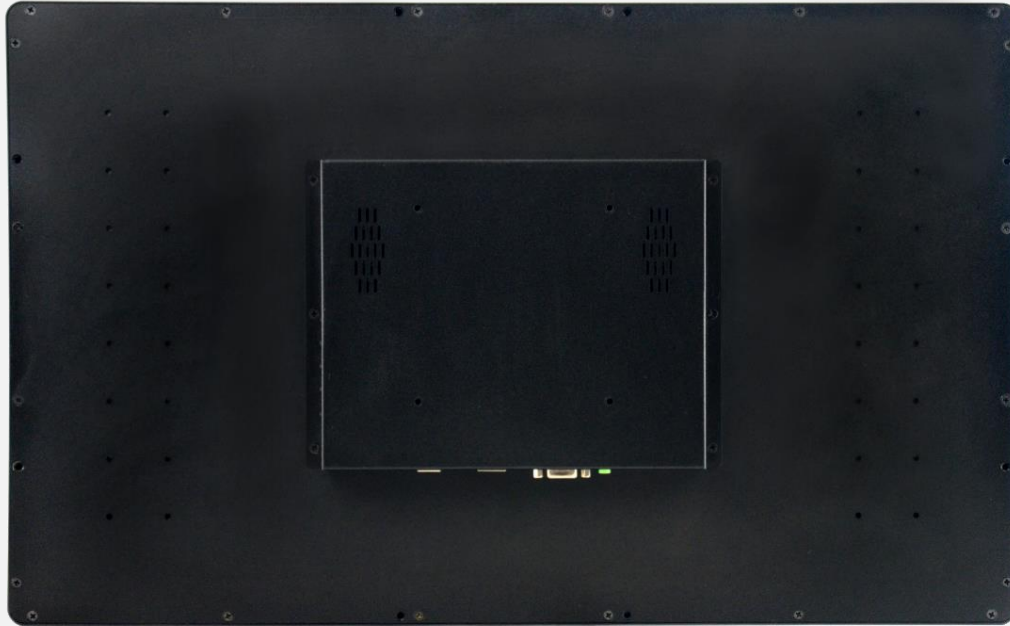

Front Cover :

Full Flat Design

HANNSpree

HO 165 PGB
15.6" Open Frame Touch Monitor

Experts in **Display**

