




Specifications

Output	700W
Mainboard 24Pin	1x
4Pin/ 4+4Pin/ 8Pin 12V	-/2x/-
PCI-Express 6+2Pin	-
PCI-Express 6Pin	-
IDE 4Pin	6x
S-ATA	2x
Floppy	1x
Fan Monitoring	-
115/230V Input	•/• (auto.)
PFC	Active
Fan Dimensions	4x 40mm
Fan Control	Auto.
Redundant	•
Protection Circuit	OVP, SCP, OPP, OCP, OTP
MBTF	Average 100000 h
Operating Temperatur	0 to 50°C
Storage Temperatur	-40 to 70°C
PSU Dimensions (H/W/D)	84/150/190mm
Weight (net)	3.69kg
Weight (gross)	4.09kg
Packing Units (VE/VPE)	1/4
Warranty	36 Months
Article Number	99997230
EAN-Code	4260455642286
Features	Bicoloured LED status display per module Acoustic and visual alarm for module and fan failure Cable for reset and alarm LED TTL-Output for failure signals on compatible Backplanes or Mainboards
80+ Certificate	



• = existing
- = non existing

Connectors

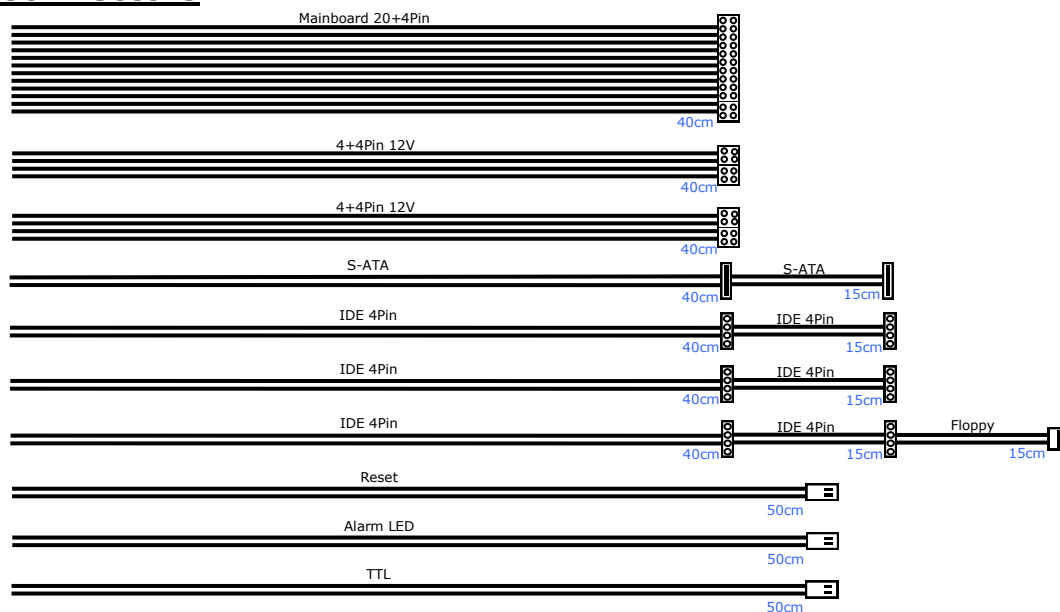

Efficiency (min.)

PFC from 10% Load <0.8, from 20% Load <0.9	Full Load (100%)	Typical Load (50%)	Light Load (20%)
115VAC	86%	90%	88%
230VAC	87%	92%	89%

AC INPUT	VOLTAGE		CURRENT			FREQUENCY
	100-240V		10A Max.			50/60HZ
DC OUTPUT	+5V	+3.3V	+12V	-12V	+5Vsb	Max. 700W
	30A	30A	58A	1A	3A	
Attention: +5V & +3.3V combined max. 200W						