

EAN: 6414150098376
static.oras.com/7402U-33



- Shower solutions
- Thermostatic
- Wall mounted
- Matt black
- Temperature control handle, Flow control handle
- Turn operated diverter, Integrated into flow control handle
- Hand shower, Shower rail, Overhead shower, Shower hose (1750 mm), Variable fixing points, Rotatable ball joint connection, Anti limescale technology (easy to clean)
- Intense - invigorating water stream
- Safety stop against scalding at 38°C, The housing of the fittings conducts minimal heat
- Ceramic head part for flow control, Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
- Eccentric coupling(s), Cover plate(s), Silencer(s)
- Flexible length / can be shortened
- 1 spray function

Technical data

Flow properties

Flow-rate at 300 kPa	0.25 / 0.26 l/s
Pressure loss with flow (0.2 l/s)	180 kPa

Technical properties


DN-size (nominal dimension)	DN 15
Hot water supply	max. +65°C
Working pressure	100 - 1000 kPa
Connection size	G1/2
Installation width	CC150± 15 mm
Projection	436 - 460 mm
Backflow prevention (EN1717)	EB
Material	Brass




Regulations

EN standard	EN 1111, EN 1112, EN 1113
Noise class	I (ISO 3822)


Approvals and Declarations

KIWA SE	1664
---------	-------------

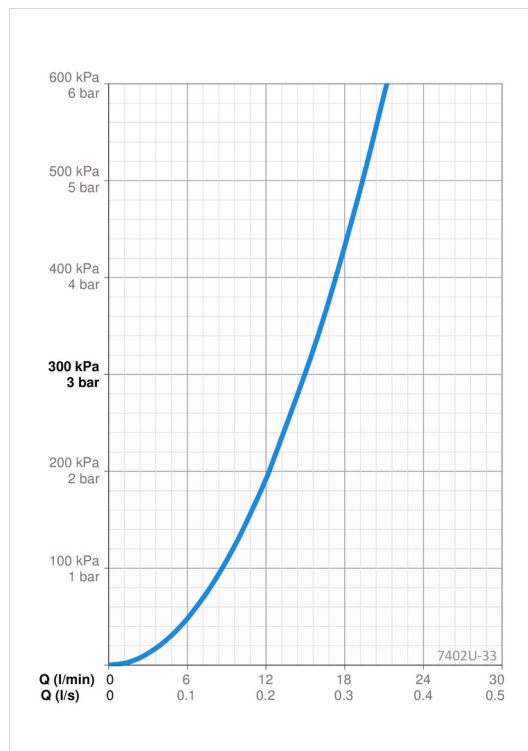

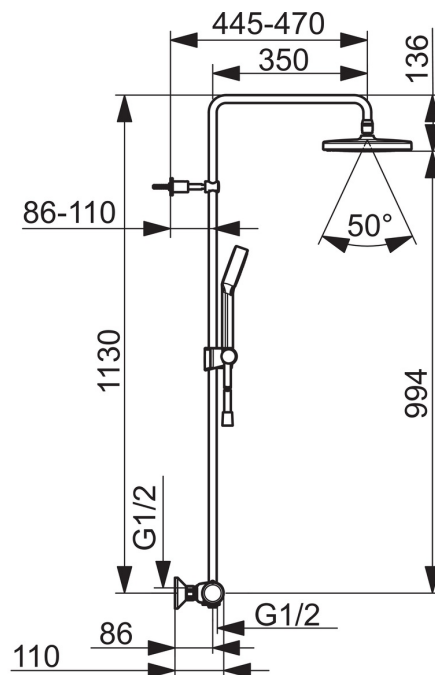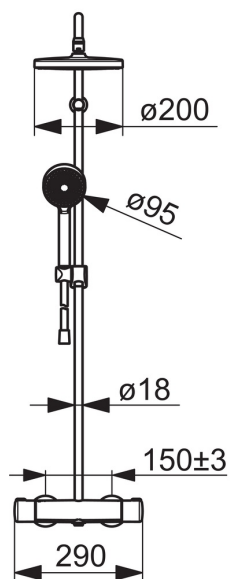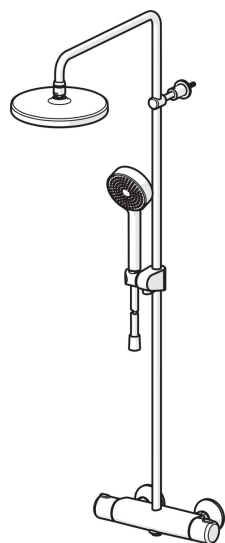

Spare parts

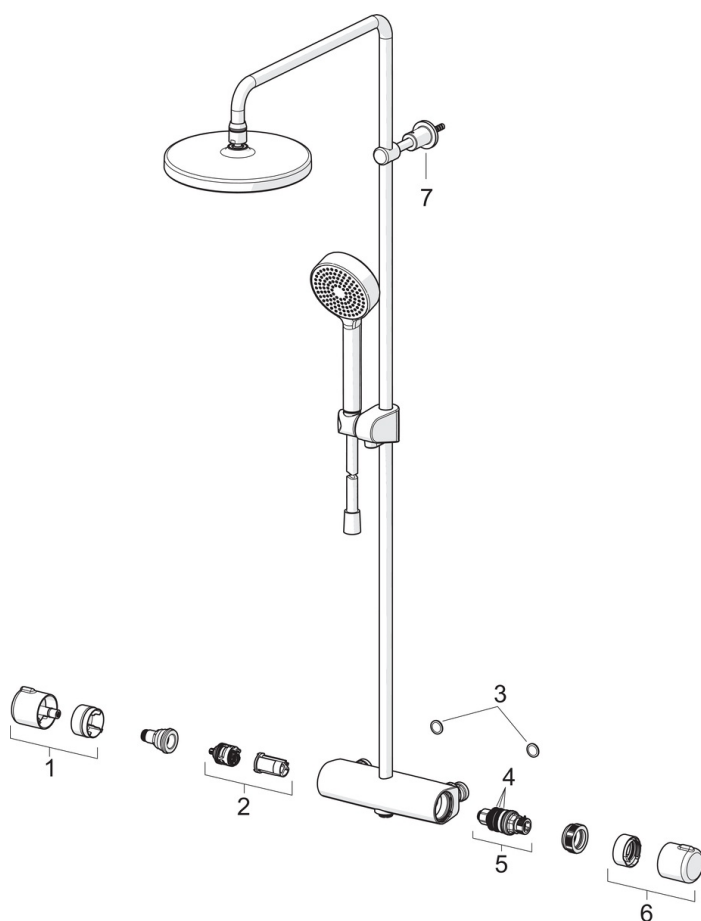

SP7402-33

Name	Code
01 Flow control handle Matt black	1008616V-33
02 Diverter and cartridge	601278V
03 Filter sealing, G3/4, DN20	178375V
03 Litter filters, G1/2, DN15	198094/2
04 O-ring kit	178796V
05 Thermostatic cartridge	178780V
06 Temperature control handle Matt black	1008607V-33
07 Shower pipe holder Matt black	1001314V-33