
T-CHARGE 12



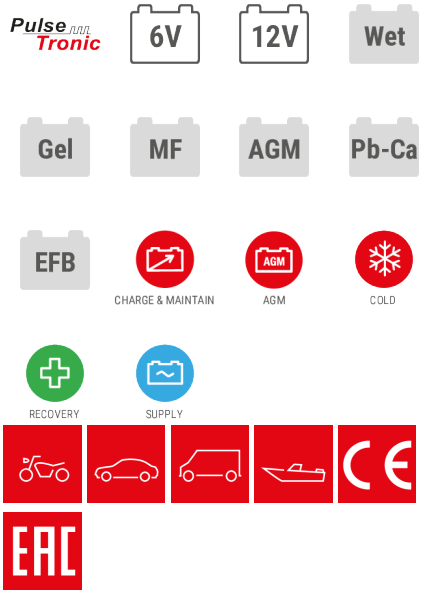

- Multi-functional electronic battery charger, maintainer and tester for WET, GEL, AGM, MF, PbCa, EFB, Li 6/12V batteries.
- Automatic charging and maintenance in Pulse Tronic. Choice 3 charge voltages: 6V, 12V/1A (motorbike), 12V/4A (car). Charging level led display.
- Advanced functions: AGM for charging and maintenance of AGM batteries; COLD for charging and maintenance of batteries at low temperatures; RECOVERY to recover sulphated batteries.
- IP65 level ensures protection against dust, water and humidity. Compact and lightweight, for easy transport and positioning.
- Safety guaranteed by protection against overloads, short circuit and polarity reversal.
- Cable with clamps and cable with eyelets.

TECHNICAL DATA

CODE	**807567**	CHARGING VOLTAGE	**6 / 12 V**	MAX.RATED REFERENCE CAPAC.	**70 Ah**
SINGLEPHASE MAINS VOLTAGE	**230 V**	EFFECTIVE CHARGING CURRENT	**1 / 4 A**	PROTECTION DEGREE	**IP65**
MAINS FREQUENCY	**50 / 60 Hz**	RATED CHAR.CUR.EN60335-2-29	**1 / 4 A**	DIMENSIONS (LxWxH)	**17 x 6,5 x 3,5 cm**
CHARGING ABSORBED POWER	**55 W**	MIN.RATED REFERENCE CAPAC.	**2 Ah**	WEIGHT	**0,6 kg**

SUPPLIED ACCESSORIES

125017	EYELETS PATCH CORD
125018	CLAMPS PATCH CORD

ON REQUEST ACCESSORIES

OTHER CHARGING/STARTING ACCESS	
802986	BATTERY CONNECTOR WITH EYELETS M6
804037	BATTERY CONNECTOR WITH EYELETS M8
804038	CONNECTOR WITH CAR AND MOTORBIKE 12V CIGARETTE LIGHTER PLUG

DESCRIPTION

Multifunction, battery charger and maintainer for 6/12V WET, GEL, AGM, MF, PbCa, EFB batteries.
Choice of 3 charge voltages in Pulse Tronic: 6V, 12V/1A (motos), 12V/4A (autos).
Advanced specific functions for the charge and maintenance of batteries at low temperatures and of AGM batteries.
The activation of the RECOVERY function allows for the recovery of sulphated batteries.
Features:
- Automatic charge and maintenance in Pulse Tronic;
- 3 charge voltages;
- Led visualization of the charge level;
- AGM function for the charge and maintenance of AGM batteries;
- COLD function to charge and maintain batteries at low temperatures;
- RECOVERY function to recover sulphated batteries;
- Protections against overloads, shortcircuit and polarity reversal.

Equipped with cable with clamps and cable with eyelets.

DOWNLOAD

CATALOG IMAGE

INSTRUCTION MANUAL

BROCHURE