



MASTER LEDtube InstantFit HF T5



Master LEDtube HF 1200mm HO 26W 830 T5 OE

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescent. These T5 lighting tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings thanks to low energy consumption and an exceptionally long lifetime make these T5 LED tubes the choice for every demanding application.

Product data

General information	
Cap-Base	G5 [G5]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	60000 h
Switching Cycle	50000X
Technical Type	26-54W
Flux measurement reference	Sphere
Light technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	200 °
Luminous Flux (Nom)	3700 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	142.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80


LLMF At End Of Nominal Lifetime (Nom) 70 %	
Operating and electrical	
Input Frequency	30K to 60K Hz
Power (Nom)	26 W
Lamp Current (Max)	620 mA
Lamp Current (Min)	300 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	20-90 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C

MASTER LEDtube InstantFit HF T5

T-Case Maximum (Nom)	55 °C
Controls and dimming	
Dimmable	Yes - Check ballast compatibility
Mechanical and housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1200 mm
Bulb Shape	Tube, double-ended
Approval and application	
Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA Keur certificate



Energy Consumption kWh/1000 h	26 kWh
EPREL Registration Number	406209
Product data	
Full product code	871869974951400
Order product name	Master LEDtube HF 1200mm HO 26W 830 T5 OE
EAN/UPC - Product	8718699749514
Order code	929002352002
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002352002
Net Weight (Piece)	0.240 kg

Dimensional drawing

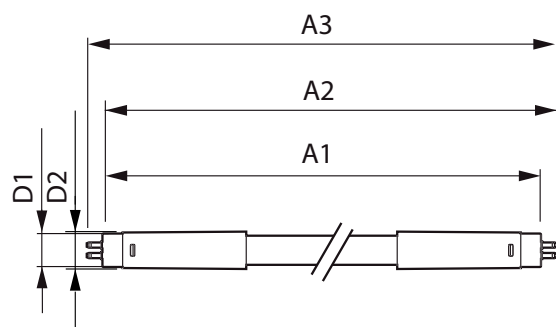

Product	D1	D2	A1	A2	A3
Master LEDtube HF 1200mm HO 26W 830 T5 OE	15.5 mm	19 mm	1149 mm	1156 mm	1163 mm

Photometric data

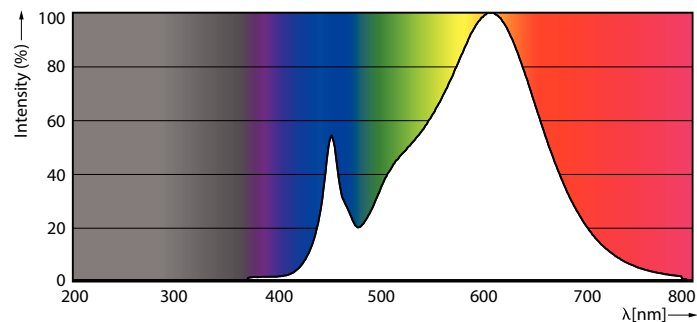


LEDtube MAS 26W G5 3700lm 830

LEDtube MAS 26W G5 3700lm

MASTER LEDtube InstantFit HF T5


Photometric data




General Photometric Data Page 10 of 10

LEDtube MAS 26W G5 3700lm 830 1200mm


Lifetime

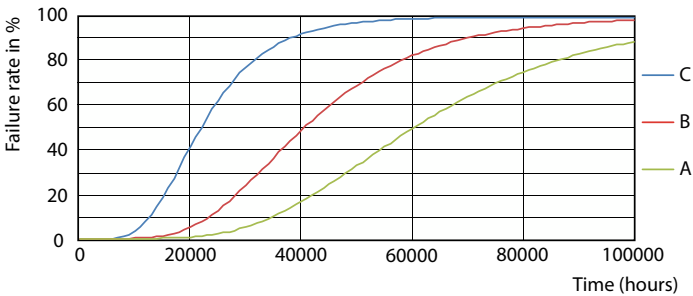


FailureRate

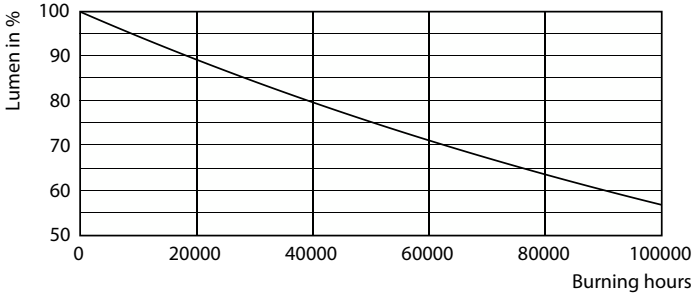

Lumen Maintenance Diagram

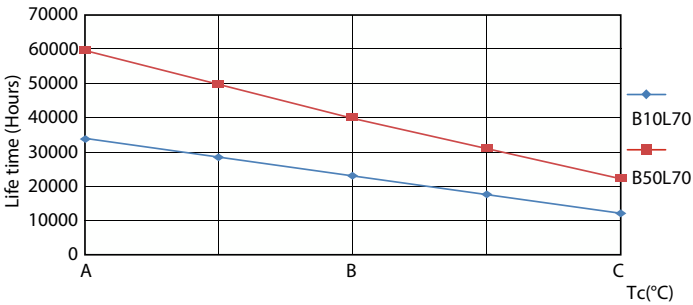


LifetimeVsTc

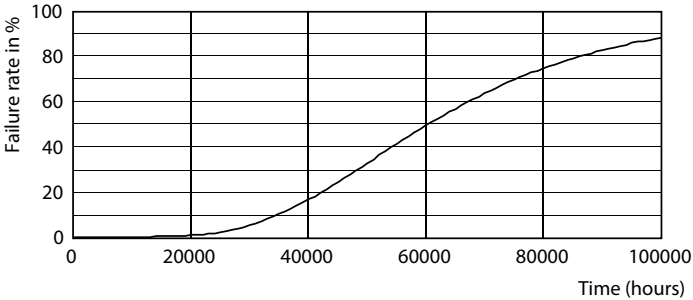

Life Expectancy Diagram

MASTER LEDtube InstantFit HF T5

Lifetime

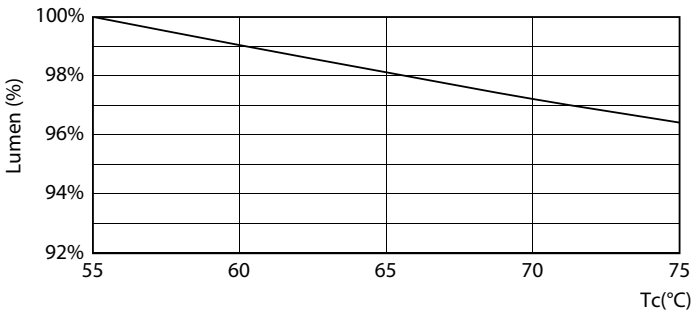

LEDtube 26W 60K LumenVsTc 1

